Product Information Sheet

1101 D Type Pneumatic Caster

Solid Rubber (Black) Wheel Diameter × Wheel Width 250 x 74mm



YJ-11040800011473

Rigid Casters, Welded Caster Fork — 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing
Zine-Plated surface, Top Plate type (6T) Mounting Type device
Cast Iron wheel center, High-Quality Resilient Rubber Wheel Tread, Wheel Tread material has Compression Resistance resistance and wear resistance
Black, Bearing — Ball Bearings.

Wheel surface: High-quality elastic rubber
Wheel Center: iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


◉ Metric ○ Imperial

Wheel Diameter	250mm
Wheel Width	74mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Overall Height	303mm
Hardness Of Tread	75±5° Shore A
Load Capacity (Dynamic)	125kgs
Load Capacity (Static)	178.5kgs
Temperature	-20°C to +70°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	6.47kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	●●●●○
Operating Noise	●●●●●
Floor Surface Preservation	●●●●●

Dimensions

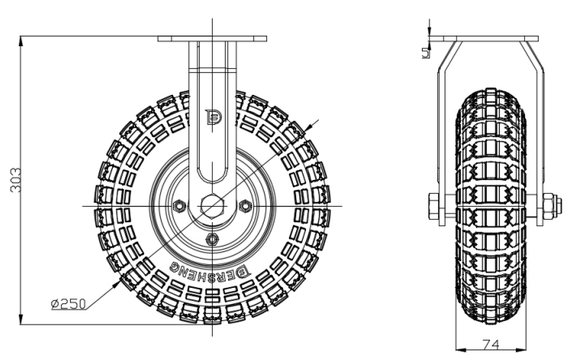

Mounting

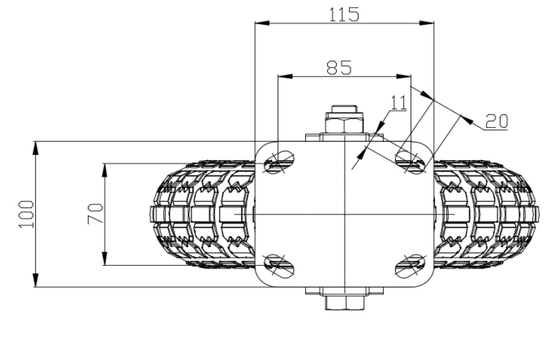

Drawings are for reference only and may differ from the product.

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com