

1120 Single Raceway, Light Duty Caster Series

MRC Wheel (Transparent) Diameter × Width 50×21mm

EAN

11200200071013


Swivel Casters, Riveted and Stamping Top Plate—46 x 35mm Bolt Hole Spacing
Zinc-Plated surface, Mounting Type - Top Plate device
Reinforced Polypropylene and Wheel Tread
Transparent, Bearing—Ball Bearings.

Wheel surface: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

DERSHENG
Dersheng Casters Keep Rolling

Picture may differ from original product

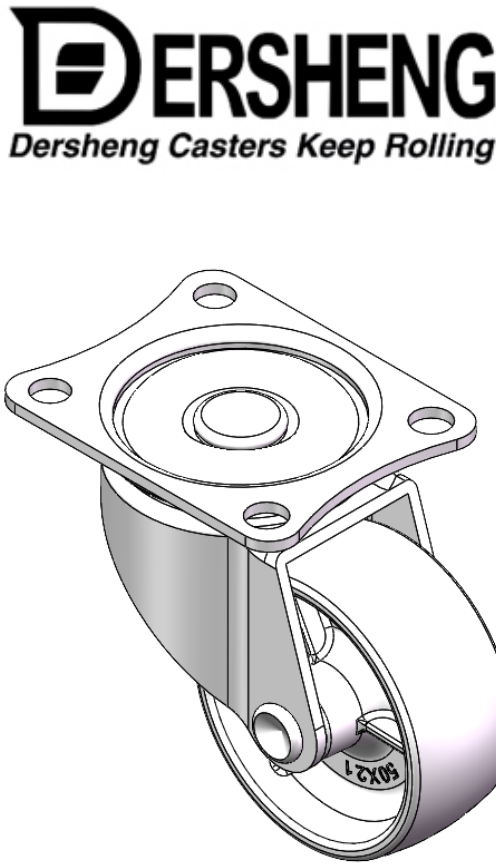

Picture may differ from original product

☒ Imperial ☐ Metric	
Wheel Diameter	2 "
Wheel Width	7/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	2-3/8 " x 1-7/8 "
Bolt Hole Spacing	1-7/8 " x 1-3/8 "
Plate Hole	1/4 "
Offset	1 "
Swivel Interference	4 "
Overall Height	2-5/8 "
Swivel Radius	2 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	66lbs
Load Capacity (Static)	99lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.3lbs
Standard	ISO22883

Rolling Resistance ● ● ● ● ●

Operating Noise ● ● ○ ○ ○

Floor Surface Preservation ● ● ○ ○ ○

Technical drawing of a mechanical part, likely a flange or bracket, showing dimensions and a section line.

Dimensions:

- Overall width: 59
- Overall height: 47
- Inner diameter of the central hole: $\phi 6.5$
- Outer diameter of the central hole: 46
- Distance from the center of the central hole to the center of the top hole: 35
- Distance from the center of the central hole to the center of the bottom hole: 35
- Distance from the center of the central hole to the center of the left hole: 35
- Distance from the center of the central hole to the center of the right hole: 35
- Radius of the outer edge: R5

© Copyright 2025 DershengInternational www.dersheng.com