1102 B Type Caster Series

NBR (milling black) Wheel Diameter x Wheel Width 100 x 37mm

EAN


KS-11020400042011

Swivel Caster, Welded Caster Fork - 90x60 Bolt Hole Spacing Blue painted finish, Mounting Type - Top Plate Cast Iron core, High-Quality, highly Resilient Rubber Wheel Tread Cast Iron black, Bearing - Ball Bearing

Wheel surface: Made of high-quality, highly elastic rubber

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Hardness Of Tread

Standard

Wheel Diameter 4 "

Wheel Width 1-1/2 "

Wheel Bearing Wheels With Ball Bearings

85±5° Shore A

ISO22883

Plate Size 4-13/16 " x 3-9/16 "

Bolt Hole Spacing 3-9/16 " x 2-7/16 "

Plate Hole 1/2 "
Offset 1-5/8 "

Swivel Interference 7-7/16 "

Overall Height 5-7/8 "

Swivel Radius 3-11/16 "

Load Capacity (Dynamic) 441lbs

Load Capacity (Static) 661lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster
Stainless N/A
Electrical Conductivity N/A

Anti-Static N/A
Weight 6.1lbs

Advantages at a glance

Rolling Resistance


• • • 0 0

Operating Noise


• • • • 0

Floor Surface Preservation $\bullet \bullet \bullet \bullet \circ$

Dimensions

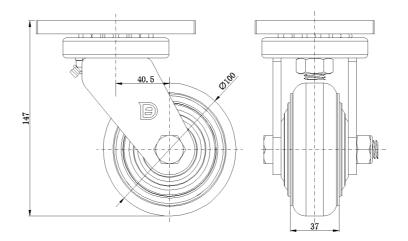

Mounting

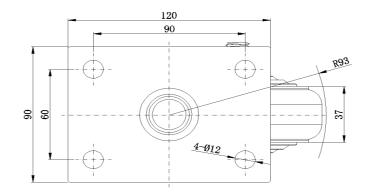

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.