1102 B Type Caster Series

MRC (Transparent) Wheel Diameter × Wheel Width 100 x 32mm


D

KS-11020400071021

Rigid Caster, Welded Caster Fork - 90x60 Bolt Hole Spacing Blue-painted finish, Mounting Type - Top Plate Natural thermoplastic Wheel Center and Wheel Tread Bearings - Ball Bearings with special anti-tangle wheel covers

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-5/16 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-13/16 " x 3-9/16 "

Bolt Hole Spacing

3-9/16 " x 2-7/16 "

Plate Hole 1/2 "

Overall Height 5-7/8 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

Fork Type

Stainless

Stainless

Stainless

Fork Type

Rigid Caster

N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.7lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • •


Operating Noise • • • •

Floor Surface Preservation $\bullet \bullet \circ \circ \circ$

Dimensions

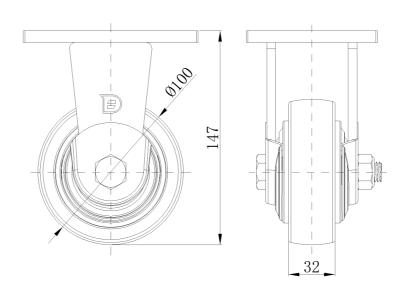

Mounting

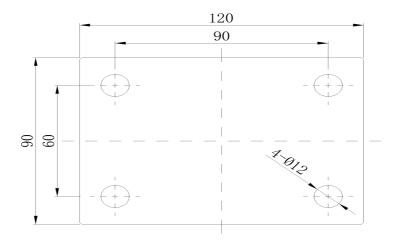

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.