# 1102 B Type Caster Series

Nylon Wheel Diameter × Wheel Width 100 x 32mm


EAN

KS-11020400074071

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 90x60 Bolt Hole Spacing Reinforced Polypropylene Wheel Center and Wheel Tread, natural color Bearings—Ball Bearings

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

#### Technical Data

## ● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 32mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 120 x 90mm **Bolt Hole Spacing** 90 x 60mm Plate Hole 12mm Offset 40.5mm 296mm Swivel Interference Overall Height 147mm **Swivel Radius** 148mm Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 250kgs
Load Capacity (Static) 375kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.57kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

### **Dimensions**

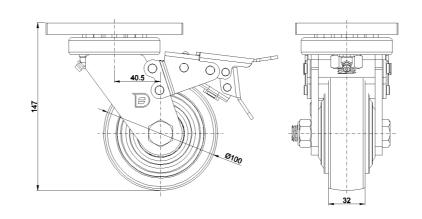

## Mounting

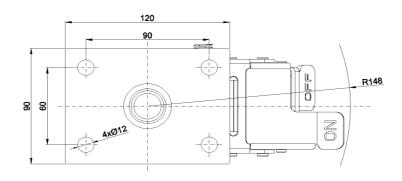

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.