# 1102 B Type Caster Series

Nylon Wheel Diameter × Wheel Width 100 x 32mm


EAN

KS-11020400074071

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 90x60 Bolt Hole Spacing Reinforced Polypropylene Wheel Center and Wheel Tread, natural color Bearings—Ball Bearings

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

#### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-5/16 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-13/16 " x 3-9/16 "

Bolt Hole Spacing

3-9/16 " x 2-7/16 "

Plate Hole 1/2 "

Offset 1-5/8 "

Swivel Interference 11-3/4 "

Overall Height 5-7/8 "

Swivel Radius 3-5/8 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 827lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.7lbs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise 


● ● ○

Floor Surface Preservation • • • • • •

#### **Dimensions**

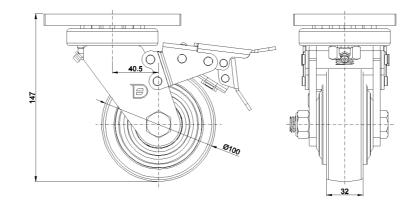

## Mounting

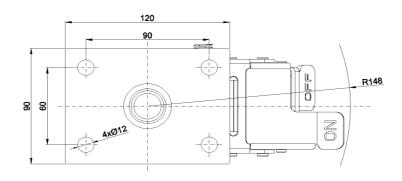

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.