1102 B Type Caster Series

CPD Wheel Diameter × Wheel Width 100 x 32mm


EAN

KS-11020400294021

Casters with rear brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 90x60 Bolt Hole Spacing Polypropylene Wheel Center and Wheel Tread, natural color Bearings—Ball Bearings with special anti-tangle wheel covers

Wheel surface: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Load Capacity (Static)

Wheel Diameter 4 "

Wheel Width 1-5/16 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-13/16 " x 3-9/16 "

Bolt Hole Spacing

3-9/16 " x 2-3/8 "

Plate Hole 1/2 "

Offset 1-5/8 "

Swivel Interference 8 "

Overall Height 5-7/8 "

Swivel Radius 4 "

Hardness Of Tread 72±5° Shore D
Load Capacity (Dynamic) 441lbs

Temperature 4°F to +140°F

Fork Type Swivel Caster With Rear Brake

661lbs

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.1lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • •


Operating Noise

 \bullet \bullet \circ \circ


Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions





Mounting

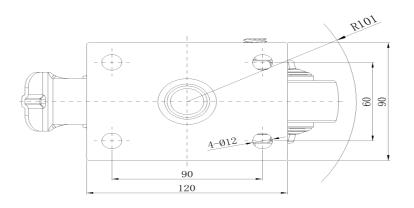

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.