1102 B Type Caster Series

PU (red round) Wheel Diameter x Wheel Width 100 x 34mm

EAN


KS-11020400331111

Rigid Caster with Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 90x60 Bolt Hole Spacing Cast Iron core with High Quality Polyurethane Wheel Tread, Cast Iron red Bearings—Ball Bearings

Wheel tread: Made of high quality polyurethane

Wheel center: iron core/cast iron

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 34mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 120 x 90mm

Bolt Hole Spacing 90 x 60mm

Plate Hole 12mm

Overall Height 147mm

Hardness Of Tread 93±5° Shore A

That are so of fred Sold Shor

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 375kgs

Temperature -20°C to +70°C

Fork Type Rigid Caster

Stainless N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.03kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \circ \circ

Operating Noise


• • • 0

Floor Surface Preservation • • • • •

Dimensions



Mounting

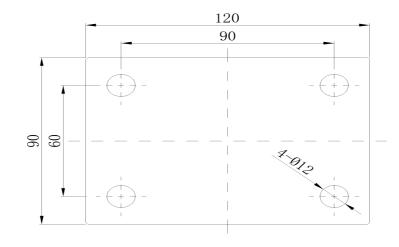

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.