1102 B Type Caster Series

PU (red round) Wheel Diameter x Wheel Width 100 x 34mm

EAN


KS-11020400331111

Rigid Caster with Welded Caster Fork
Blue painted finish, Mounting Type - Top Plate, 90x60 Bolt Hole Spacing
Cast Iron core with High Quality Polyurethane Wheel Tread, Cast Iron red
Bearings—Ball Bearings

Wheel tread: Made of high quality polyurethane

Wheel center: iron core/cast iron

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-13/16 " x 3-9/16 "

Bolt Hole Spacing 3-9/16 " x 2-7/16 "

Plate Hole 1/2 "

Overall Height 5-7/8 "

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 827lbs

Temperature -4°F to +158°F

Fork Type Rigid Caster

Stainless N/A
Electrical Conductivity N/A

Test for a contractivity

Anti-Static N/A
Weight 4.5lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \circ \circ


Operating Noise

• • • 0


Floor Surface Preservation $\bullet \bullet \bullet \bullet \circ$

Dimensions





Mounting

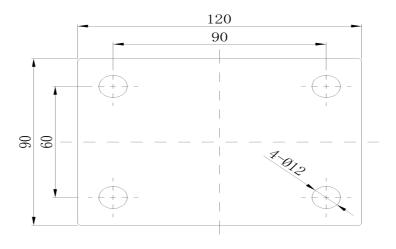

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.