

## 1102 B Type Caster Series

PU (red flat) Wheel Diameter x Wheel Width 100 x 34mm


EAN

KS-11020400332021

Swivel Caster, Welded Caster Fork - 90x60 Bolt Hole Spacing  
 Blue painted finish, Mounting Type - Top Plate  
 Cast Iron core, High Quality Polyurethane Wheel Tread, Cast Iron red  
 Bearing - Ball Bearing with special anti-wrap cap

Wheel Tread: High-Quality Polyurethane  
 Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

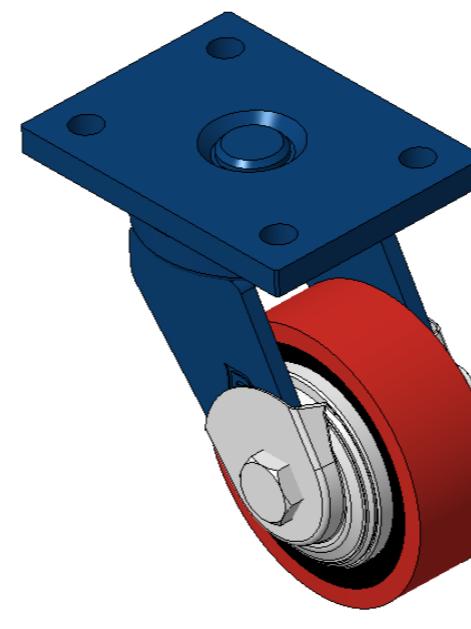

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	100mm
Wheel Width	34mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	120 x 90mm
Bolt Hole Spacing	90 x 60mm
Plate Hole	12mm
Offset	40.5mm
Swivel Interference	186mm
Overall Height	147mm
Swivel Radius	93mm
Hardness Of Tread	93±5° Shore A
Load Capacity (Dynamic)	250kgs
Load Capacity (Static)	375kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.75kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

## Dimensions

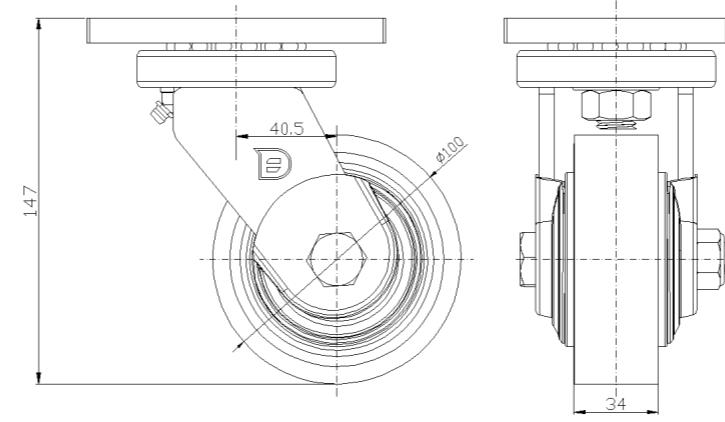

## Mounting

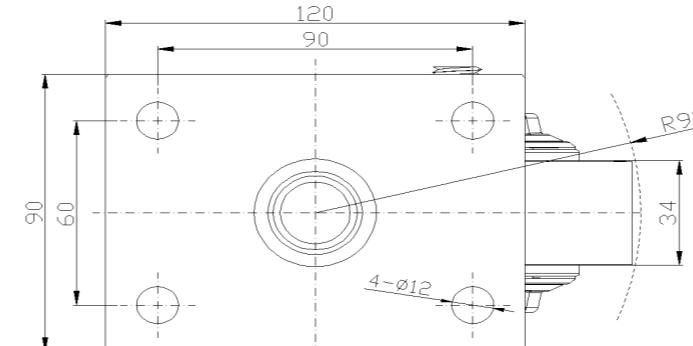

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com