



1102 B Type Caster Series

PU (red flat) Wheel Diameter x Wheel Width 100 x 34mm


EAN

KS-11020400334021

Casters with rear brake and With locking system, Welded Caster Fork  
Blue-painted finish, Mounting Type - Top Plate, 90x60 Bolt Hole Spacing  
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red  
Bearings—Ball Bearings

Wheel tread: Made of high quality polyurethane  
Wheel center: iron core/cast iron

Drawings are for reference only and may differ from the product

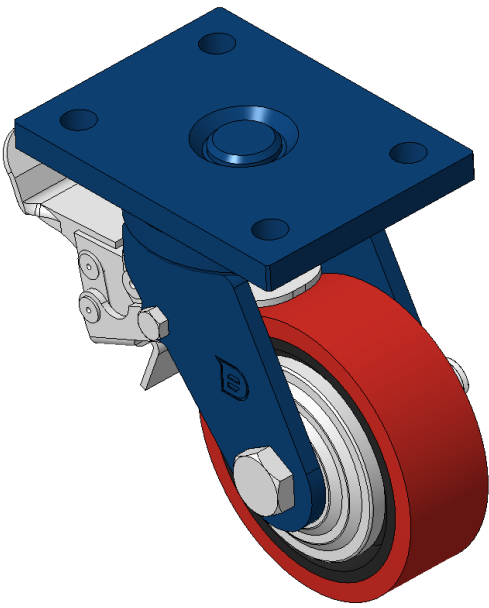

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                               |
| Wheel Diameter                                                         | 100mm                         |
| Wheel Width                                                            | 34mm                          |
| Wheel Bearing                                                          | Wheels With Ball Bearings     |
| Plate Size                                                             | 120 x 90mm                    |
| Bolt Hole Spacing                                                      | 90 x 60mm                     |
| Plate Hole                                                             | 12mm                          |
| Offset                                                                 | 40.5mm                        |
| Swivel Interference                                                    | 202mm                         |
| Overall Height                                                         | 147mm                         |
| Swivel Radius                                                          | 101mm                         |
| Hardness Of Tread                                                      | 93±5° Shore A                 |
| Load Capacity (Dynamic)                                                | 250kgs                        |
| Load Capacity (Static)                                                 | 375kgs                        |
| Temperature                                                            | -20°C to +70°C                |
| Fork Type                                                              | Swivel Caster With Rear Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 2.97kgs                       |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

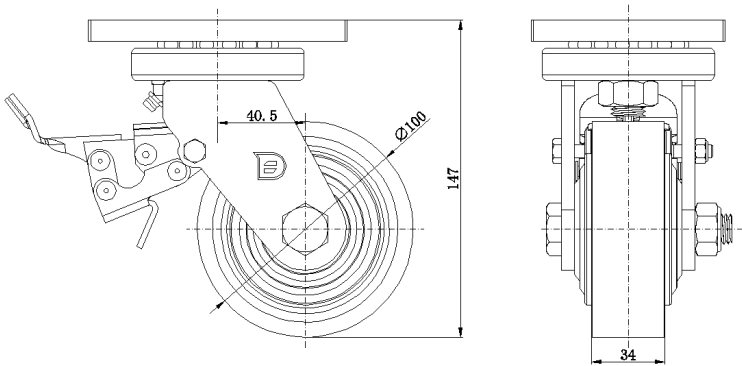

Mounting

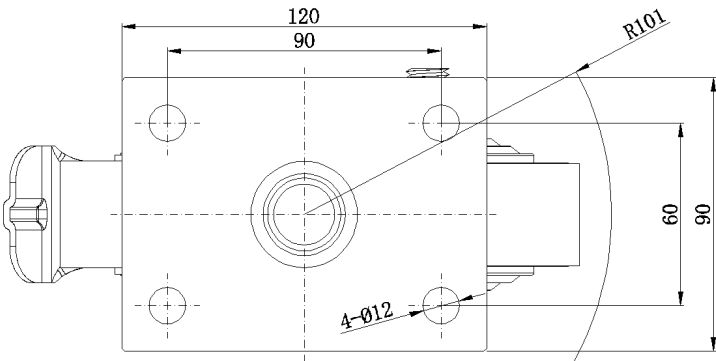

\* For any deviation between metric and imperial spec, please refer to the metric spec.