


## 1102 B Type Caster Series

PU (red flat) Wheel Diameter x Wheel Width 100 x 34mm

EAN

KS-11020400334081

Casters with front brake and With locking system, Welded Caster Fork  
 Blue-painted finish, Mounting Type - Top Plate, 90x60 Bolt Hole Spacing  
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread  
 Red Cast Iron finish, Bearing—Ball Bearings

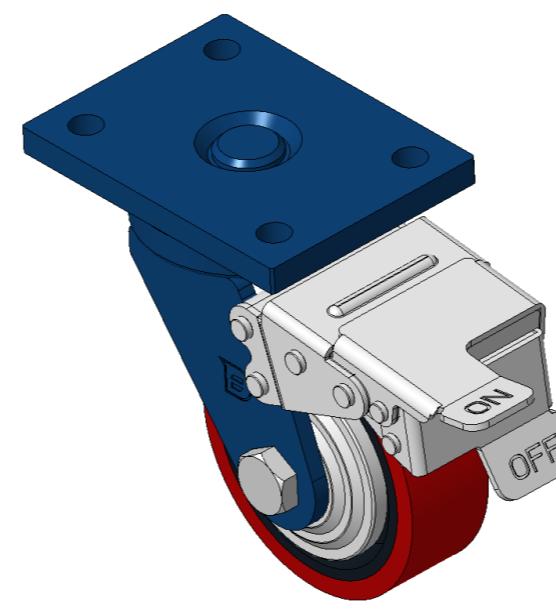

Picture may differ from original product

Wheel tread: high quality polyurethane wheel tread  
 Wheel center: iron core/cast iron

Drawings are for reference only and may differ from the product

## Technical Data


 Metric  Imperial

|                         |                                |
|-------------------------|--------------------------------|
| Wheel Diameter          | 100mm                          |
| Wheel Width             | 34mm                           |
| Wheel Bearing           | Wheels With Ball Bearings      |
| Plate Size              | 120 x 90mm                     |
| Bolt Hole Spacing       | 90 x 60mm                      |
| Plate Hole              | 12mm                           |
| Offset                  | 40.5mm                         |
| Swivel Interference     | 296mm                          |
| Overall Height          | 147mm                          |
| Swivel Radius           | 148mm                          |
| Hardness Of Tread       | 93±5° Shore A                  |
| Load Capacity (Dynamic) | 250kgs                         |
| Load Capacity (Static)  | 375kgs                         |
| Temperature             | -20°C to +70°C                 |
| Fork Type               | Swivel Caster With Front Brake |
| Stainless               | N/A                            |
| Electrical Conductivity | N/A                            |
| Anti-Static             | N/A                            |
| Weight                  | 3.18kgs                        |
| Standard                | ISO22883                       |


## Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | • • • ○ ○ |
| Operating Noise            | • • • • ○ |
| Floor Surface Preservation | • • • • ○ |

## Dimensions

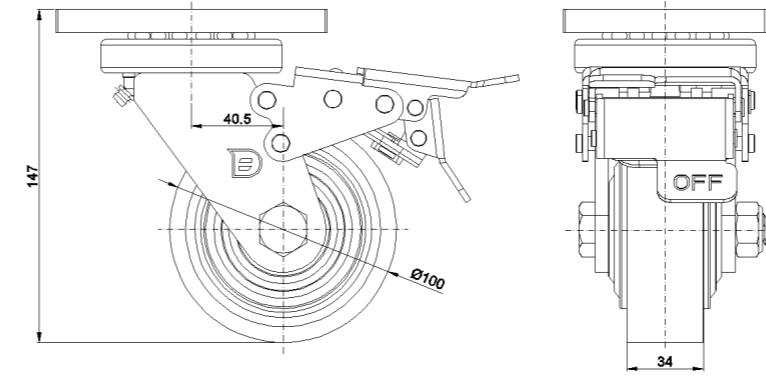

## Mounting

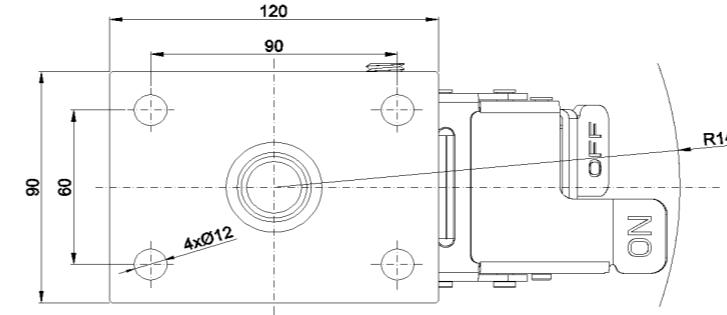

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com