# 1102 B Type Caster Series

NBR (milling black) Wheel Diameter x Wheel Width 125 x 40mm

EAN


KS-11020500044011

Rear Brake Locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High-Quality, highly Resilient Rubber tread, Cast Iron black Bearing—Ball Bearing

Wheel Tread: Made of high-quality, highly elastic rubber

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

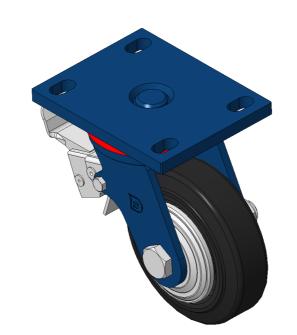

Dersheng Casters Keep Rolling

Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Hardness Of Tread

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 7/8 " x 9/16 "

 Offset
 1-11/16 "

 Swivel Interference
 8-9/16 "

 Overall Height
 6-13/16 "

 Swivel Radius
 4-5/16 "

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 827lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster With Rear Brake

85±5° Shore A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.4lbs

Standard ISO22883


#### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • ○

#### **Dimensions**

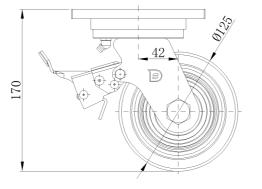



## Mounting

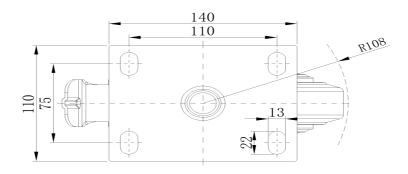

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.