

## 1102 B Type Caster Series

WPU (red flat) Wheel Diameter x Wheel Width 125 x 49mm

EAN


KS-11020500334211

Front Brake Locking system, Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron red Bearing—Ball Bearing

Wheel Tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

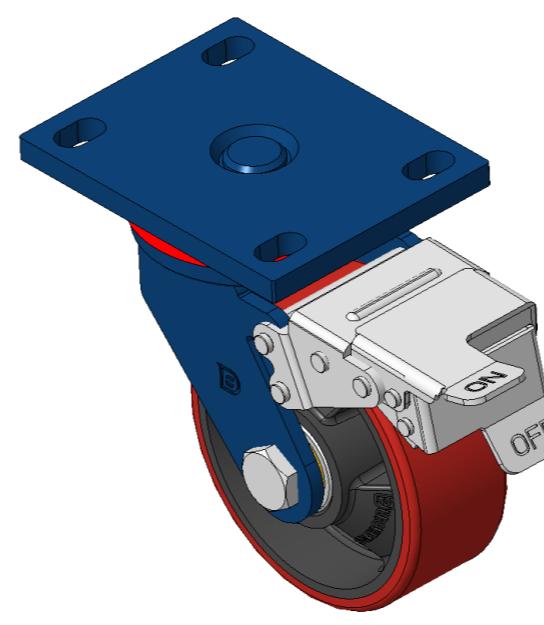

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter 125mm

Wheel Width 49mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm

Bolt Hole Spacing 110x75mm

Plate Hole 22 x 13mm

Offset 45mm

Swivel Interference 320mm

Overall Height 170mm

Swivel Radius 160mm

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 400kgs

Load Capacity (Static) 600kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.51kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

## Dimensions

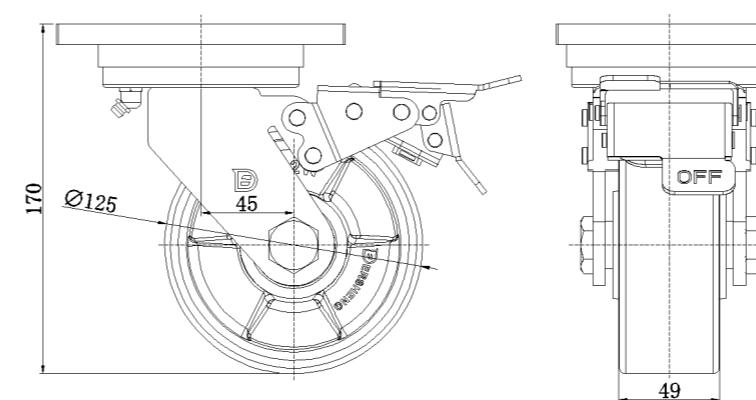

## Mounting

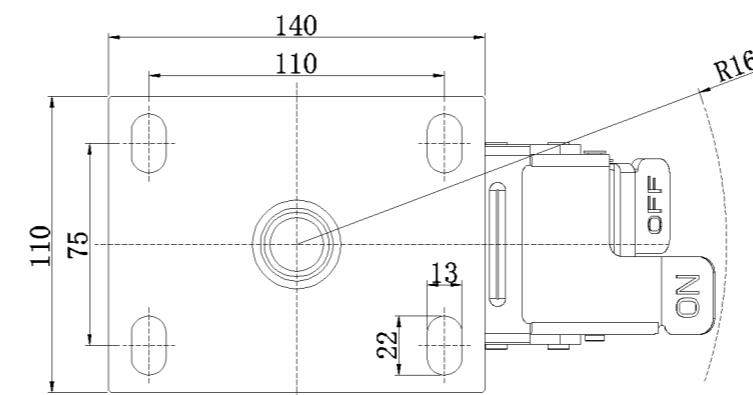

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com