1102 B Type Caster Series

Dersheng Casters Keep Rolling

QPU (Brown round) Wheel Diameter × Wheel Width 125 x 40mm

EAN


KS-11020500534131

Casters with Front Brake locking system, Welded Caster Fork - Hole spacing 110x75 Blue painted finish, Mounting Type - Top Plate Cast Iron Wheel Center, High Quality Polyurethane tread Iron brown, Bearing - Ball Bearing.

Wheel Tread: Made of high-quality polyurethane

Wheel center: iron core/cast iron

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 45mm 320mm Swivel Interference Overall Height 170mm **Swivel Radius** 160mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 450kgs
Load Capacity (Static) 675kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.27kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • •

Operating Noise


• • • • •

Floor Surface Preservation • • • • •

Dimensions

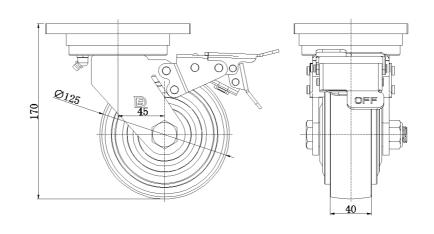

Mounting

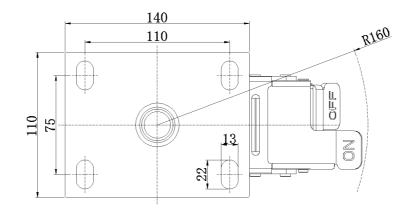

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.