1102 B Type Caster Series

Dersheng Casters Keep Rolling

NBR (milling black) Wheel Diameter x Wheel Width 150 x 40mm

EAN


KS-11020600042021

Swivel Caster with Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75mm Bolt Hole Spacing Cast Iron Wheel Center, High-Quality, highly Resilient Rubber tread, Cast Iron black Bearing—Ball Bearing with special Anti-thread wheel cover

Wheel Tread: Made of high-quality, highly elastic rubber

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 42mm Swivel Interference 240mm Overall Height 197mm **Swivel Radius** 120mm Hardness Of Tread 85±5° Shore A

Load Capacity (Dynamic) 350kgs

Load Capacity (Static) 525kgs

Temperature -20°C to +80°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.49kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • 0 0

Operating Noise


• • • • 0

Floor Surface Preservation $\bullet \bullet \bullet \bullet \circ$

Dimensions

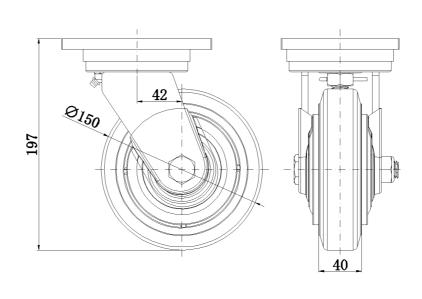

Mounting

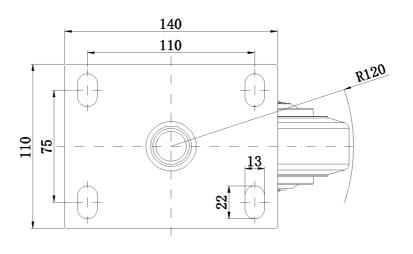

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.