# 1102 B Type Caster Series

Dersheng Casters Keep Rolling

NBR (milling black) Wheel Diameter x Wheel Width 150 x 40mm

**EAN** 

KS-11020600044021

Rear Brake Locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High-Quality, highly Resilient Rubber tread, Cast Iron black Bearing—Ball Bearing with special Anti-thread wheel cover

Wheel Tread: Made of high-quality, highly elastic rubber

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

## ● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 42mm 238mm Swivel Interference Overall Height 197mm **Swivel Radius** 119mm Hardness Of Tread 85±5° Shore A

Load Capacity (Dynamic) 350kgs

Load Capacity (Static) 525kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.22kgs

Standard ISO22883

## Advantages at a glance

Rolling Resistance


• • • 0

Operating Noise


• • • • 0

Floor Surface Preservation  $\bullet \bullet \bullet \bullet \circ$ 

#### **Dimensions**



## Mounting

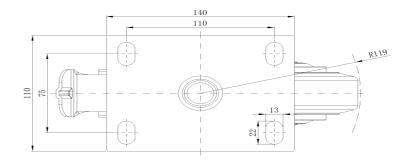

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.