# 1102 B Type Caster Series

Dersheng Casters Keep Rolling

MRC (Transparent) Wheel Diameter × Wheel Width 150 x 40mm

EAN

KS-11020600074021

Rear Brake Locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Natural thermoplastic Wheel Center and tread Precision ball bearings with special Anti-thread wheel cover

Wheel tread: Thermoplastic (PA6) Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 42mm 238mm Swivel Interference Overall Height 197mm **Swivel Radius** 119mm Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 400kgs Load Capacity (Static) 600kgs

Temperature

-20°C to +80°C Swivel Caster With Rear Brake Fork Type


Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 4.32kgs Standard ISO22883

## Advantages at a glance


Rolling Resistance Operating Noise

Floor Surface Preservation • • • • • •

### **Dimensions**

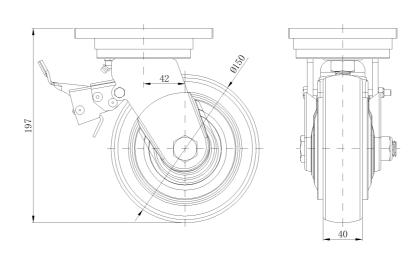

## Mounting

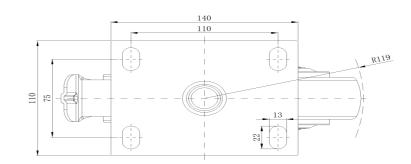

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.