1102 B Type Caster Series

•

CPD Wheel Diameter x Wheel Width 150 x 40mm

EAN

KS-11020600291021

Rigid Caster, Welded Caster Fork - 110x75 Bolt Hole Spacing Blue-painted finish, Mounting Type - Top Plate, with special anti-tangle wheel cover Polypropylene Wheel Center and tread Natural color, Bearing - Ball Bearing

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm

Bolt Hole Spacing 110x75mm

Plate Hole 22 x 13mm

Overall Height 197mm

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 350kgs
Load Capacity (Static) 525kgs

Temperature -10°C to +60°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A
Weight 2.49kgs
Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


 \bullet \bullet \circ \circ

Floor Surface Preservation • • • • • •

Dimensions

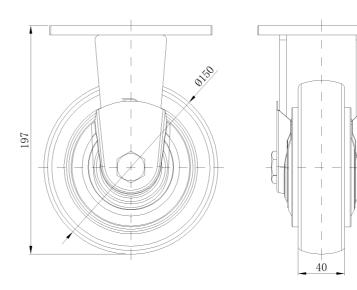

Mounting

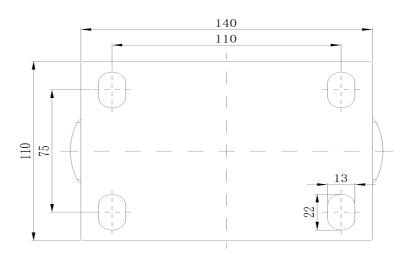

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.