1102 B Type Caster Series

CPD Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11020600292021

Swivel Caster with Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75mm Bolt Hole Spacing Natural High-quality Impact Resistance Polypropylene Wheel Center and tread Precision ball bearings with special Anti-thread wheel cover

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 42mm 240mm Swivel Interference Overall Height 197mm **Swivel Radius** 120mm Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 350kgs Load Capacity (Static) 525kgs


Temperature -12°C to +60°C Fork Type **Swivel Caster**

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 3.51kgs Standard ISO22883


Advantages at a glance

Rolling Resistance Operating Noise Floor Surface Preservation • • • • • •

Dimensions

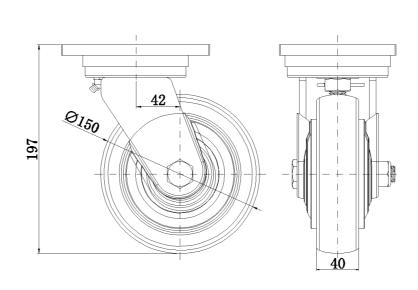

Mounting

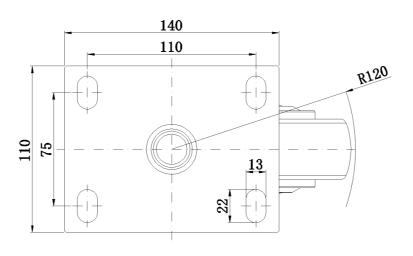

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.