1102 B Type Caster Series

CPD Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11020600292021

Swivel Caster with Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75mm Bolt Hole Spacing Natural High-quality Impact Resistance Polypropylene Wheel Center and tread Precision ball bearings with special Anti-thread wheel cover

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

6 " Wheel Diameter

1-5/8 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

5-9/16 " x 4-3/8 " Plate Size **Bolt Hole Spacing** 4-5/16 " x3" 7/8 " x 9/16 " Plate Hole 1-11/16 " Offset 9-1/2 " Swivel Interference 7-7/8 " Overall Height

4-13/16" Swivel Radius Hardness Of Tread 72±5° Shore D 772lbs Load Capacity (Dynamic)


Load Capacity (Static) 1157lbs Temperature 4°F to +140°F Fork Type **Swivel Caster**

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 7.7lbs Standard ISO22883


Advantages at a glance

Rolling Resistance Operating Noise Floor Surface Preservation • • • • • •

Dimensions

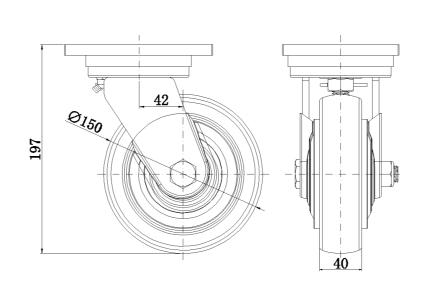

Mounting

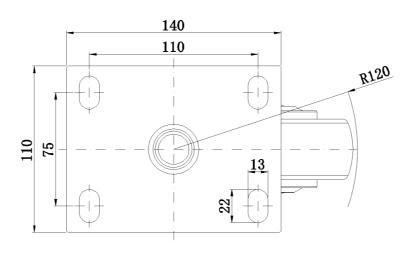

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.