1102 B Type Caster Series

CPD Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11020600294031

Casters with Front Brake locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Polypropylene Wheel Center and tread, Natural Color Bearing—Ball Bearing with special Anti-thread wheel cover

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 42mm 324mm Swivel Interference Overall Height 197mm **Swivel Radius** 162mm Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 350kgs

Load Capacity (Static) 525kgs

Temperature -12°C to +60°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.03kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


• • • 0

Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions

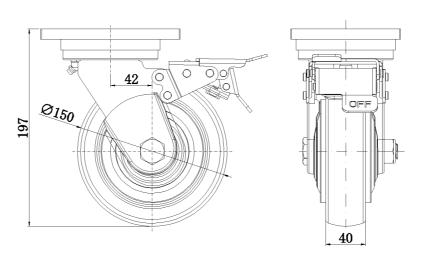

Mounting

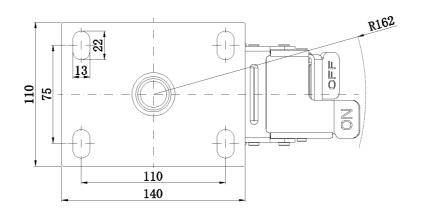

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.