1102 B Type Caster Series

CPD Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11020600294031

Casters with Front Brake locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Polypropylene Wheel Center and tread, Natural Color Bearing—Ball Bearing with special Anti-thread wheel cover

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 7/8 " x 9/16 "

 Offset
 1-11/16 "

 Swivel Interference
 13 "

Swivel Interference 13 "

Overall Height 7-7/8 "

Swivel Radius 6-1/2 "

Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 772lbs

Load Capacity (Static) 1157lbs

Temperature 4°F to +140°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 8.9lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


 \bullet \bullet \circ \circ

Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions

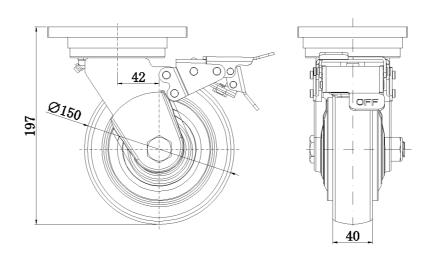

Mounting

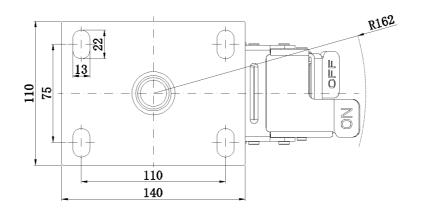

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.