1102 B Type Caster Series

Dersheng Casters Keep Rolling

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm

EAN


KS-11020600544031

Front Brake Locking system, Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing with special Anti-thread wheel cover

Wheel tread: high-quality polyurethane wheel tread

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Fork Type

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 42mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 42mm Swivel Interference 324mm Overall Height 197mm **Swivel Radius** 162mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 670kgs

Load Capacity (Static) 1005kgs

Temperature -20°C to +70°C

Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.60kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


• • • • •

Floor Surface Preservation • • • • •

Dimensions

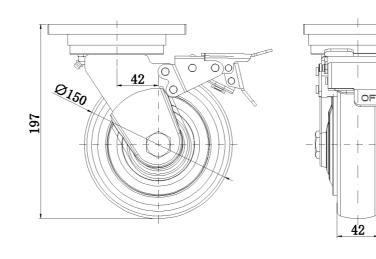

Mounting

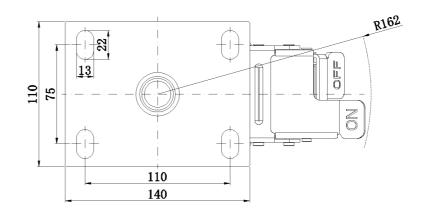

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.