1102 B Type Caster Series

Dersheng Casters Keep Rolling

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm

EAN


KS-11020600544051

Front Brake Locking system, Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: high-quality polyurethane wheel tread

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 1-11/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 7/8 " x 9/16 "

Offset 1-11/16 "

Swivel Interference 13 "

Overall Height 7-7/8 "

Swivel Radius 6-1/2 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 1477lbs

Load Capacity (Static) 2216lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 12.1lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

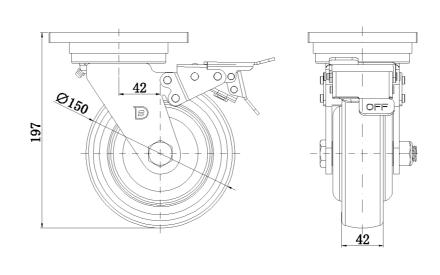

Mounting

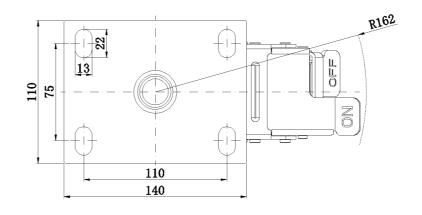

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.