



1102 B Type Caster Series


PU Wheel (Honghu) - Wheel Diameter × Wheel Width: 180×50mm

A  
KS-11020700331141

Rigid Casters, Welded Caster Fork Blue paint finish, plate Mounting Type, 110x75mm Bolt Hole Spacing Cast Iron wheel center, High-Quality, high-elasticity rubber Wheel Tread, Cast Iron red Ball Bearing bearings, with special Dust Cap

Wheel Tread: Hhigh-Quality Polyurethane  
Wheel hub: Iron wheel hub

Drawings are for reference only and may differ from the product

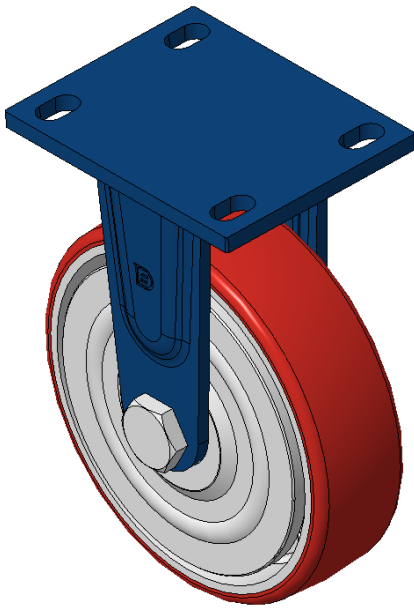

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 7-1/8 "                   |
| Wheel Width                                                            | 2 "                       |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 5-9/16 " x 4-3/8 "        |
| Bolt Hole Spacing                                                      | 4-5/16 " x3"              |
| Plate Hole                                                             | 1/2 "                     |
| Overall Height                                                         | 5-7/8 "                   |
| Hardness Of Tread                                                      | 92±5° Shore A             |
| Load Capacity (Dynamic)                                                | 992lbs                    |
| Load Capacity (Static)                                                 | 1488lbs                   |
| Temperature                                                            | -4°F to +158°F            |
| Fork Type                                                              | Rigid Caster              |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 10.3lbs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

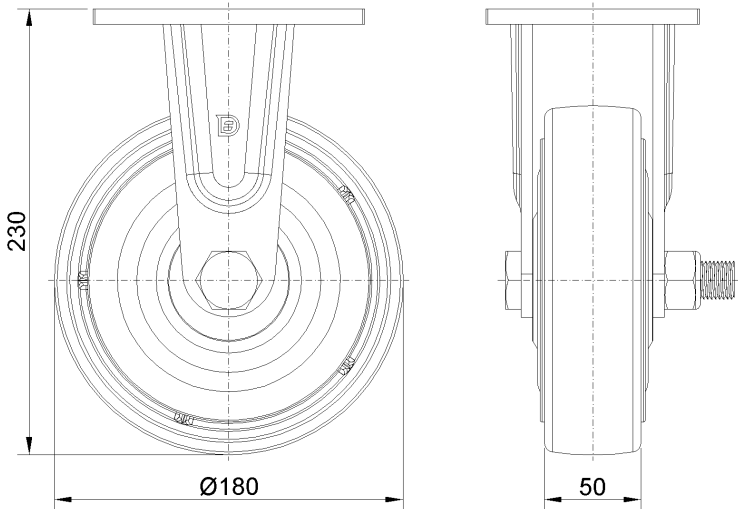

Mounting

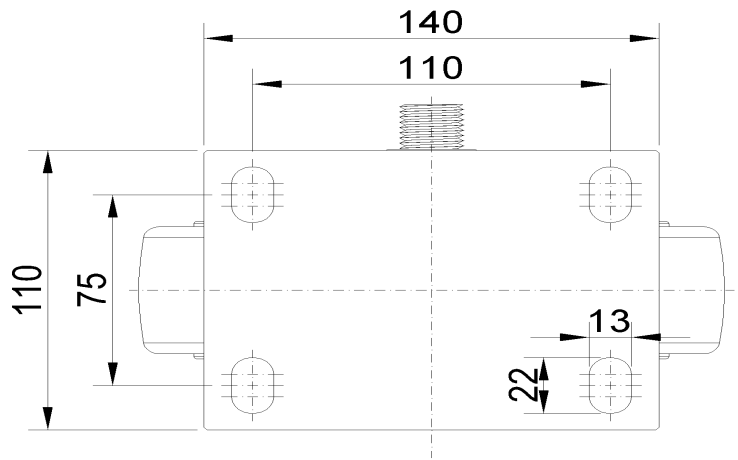

\* For any deviation between metric and imperial spec, please refer to the metric spec.