1102 B Type Caster Series

NBR (milling black) Wheel Diameter x Wheel Width 200 x 44mm

EAN

KS-11020800044021

Casters with rear brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron core, High-Quality, highly Resilient Rubber Wheel Tread, Cast Iron black Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel surface: Made of high-quality and highly elastic rubber

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 8 "

Wheel Width 1-3/4 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 7/8 " 9/16 "

 Offset
 2-1/2 "

Swivel Interference 14-1/2 "

Overall Height 9-15/16 "

Swivel Radius 7-3/8 "

Hardness Of Tread 85±5° Shore A

Load Capacity (Dynamic) 772lbs

Load Capacity (Static) 1157lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 14.4lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


• • • • 0

Floor Surface Preservation $\bullet \bullet \bullet \bullet \circ$

Dimensions

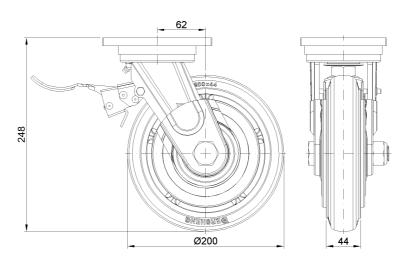

Mounting

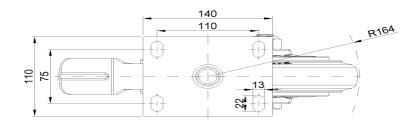

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.