1102 B Type Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 200 x 50mm


EAN

KS-11020800071021

Rigid Caster with Welded Caster Fork and blue paint finish.
Mounting Type - Top Plate, 110x75 Bolt Hole Spacing
Polypropylene Wheel Center, natural Wheel Tread
Bearings—Ball Bearings with special anti-twist wheel covers

Wheel surface: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 8 "
Wheel Width 2 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 7/8 " x 9/16 "

Overall Height 9-15/16 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 992lbs

Load Capacity (Static) 1488lbs

Temperature -4°F to +176°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 8.4lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • 0 0 0


Floor Surface Preservation • • • • •

Dimensions





Mounting

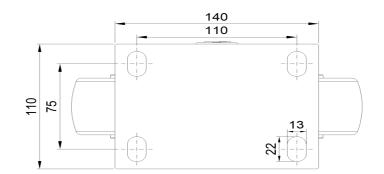

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.