## 1102 B Type Caster Series

QPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm


EAN

KS-11020800534171B

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## Technical Data

● Metric ○ Imperial

Wheel Diameter 200mm
Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 62mm 328mm Swivel Interference Overall Height 248mm **Swivel Radius** 184mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 720kgs

Load Capacity (Static) 1080kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.67kgs

Standard ISO22883

## Advantages at a glance

Rolling Resistance


• • • •

**Operating Noise** 


• • • • •

Floor Surface Preservation • • • • •

## **Dimensions**

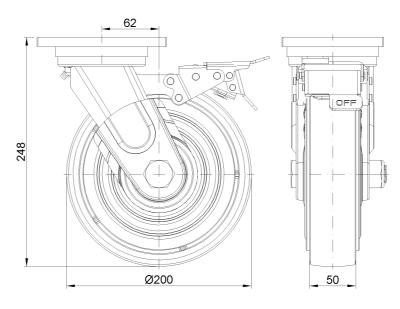

Mounting

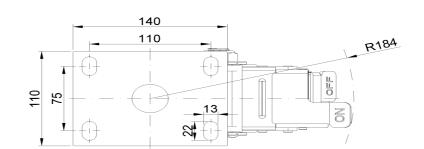

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.