## 1102 B Type Caster Series

QPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm

EAN


KS-11020800534171B

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "
Wheel Width 2 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 7/8 " x 9/16 "

Offset 2-1/2 "

Swivel Interference 13 "

Overall Height 9-15/16 "

Swivel Radius 7-3/8 "

Hardness Of Tread 92±5° Sho

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 1587lbs

Load Capacity (Static) 2381lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 14.7lbs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

## Dimensions

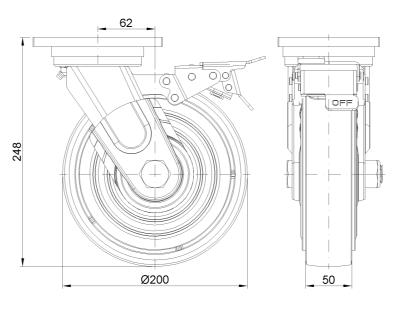

Mounting

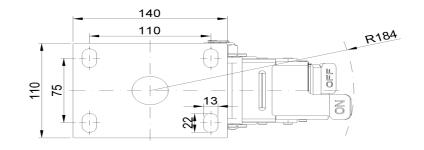

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.