



1102 B Type Caster Series

VQPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm


EAN

KS-11020800544031

Casters with rear brake and With locking system, Welded Caster Fork  
Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing  
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown  
Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

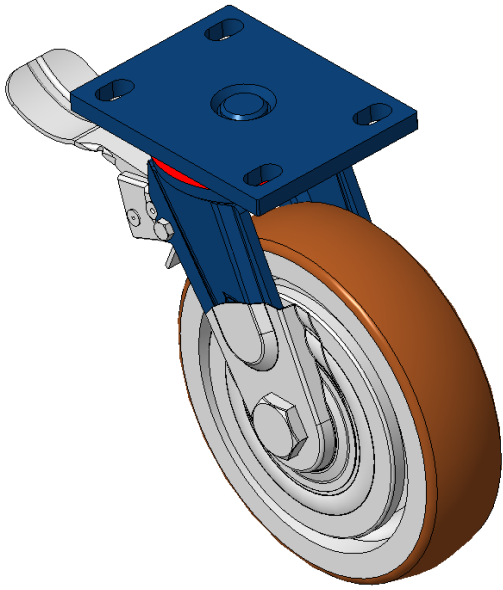

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                               |
| Wheel Diameter                                                         | 200mm                         |
| Wheel Width                                                            | 50mm                          |
| Wheel Bearing                                                          | Wheels With Ball Bearings     |
| Plate Size                                                             | 140 x 110mm                   |
| Bolt Hole Spacing                                                      | 110x75mm                      |
| Plate Hole                                                             | 22 x 13mm                     |
| Offset                                                                 | 62mm                          |
| Swivel Interference                                                    | 328mm                         |
| Overall Height                                                         | 248mm                         |
| Swivel Radius                                                          | 164mm                         |
| Hardness Of Tread                                                      | 92±5° Shore A                 |
| Load Capacity (Dynamic)                                                | 800kgs                        |
| Load Capacity (Static)                                                 | 1200kgs                       |
| Temperature                                                            | -20°C to +70°C                |
| Fork Type                                                              | Swivel Caster With Rear Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 7.97kgs                       |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

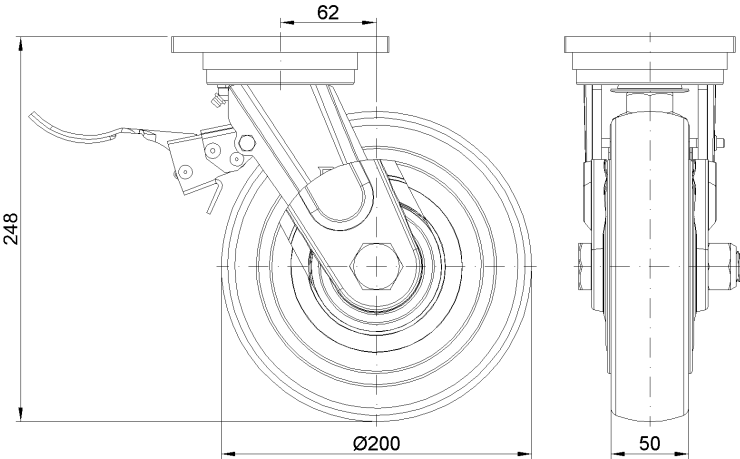

Mounting

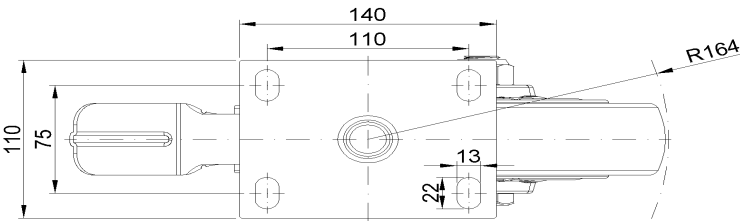

\* For any deviation between metric and imperial spec, please refer to the metric spec.