# 1102 B Type Caster Series

MRC (transparent) Wheel Diameter x Wheel Width 250 x 50mm


EAN

KS-11021000071031

Rigid Caster, Welded Caster Fork, blue paint finish Mounting Type - Top Plate, 140x85 Bolt Hole Spacing Reinforced Polypropylene Wheel Center, natural color Wheel Tread Bearing—Ball Bearing

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

### **Technical Data**

● Metric ○ Imperial

Wheel Diameter 250mm
Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 167 x 130mm

Bolt Hole Spacing 140x85mm

Plate Hole 22 x 13mm

Overall Height 305mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

Fork Type

Stainless

N/A

Electrical Conductivity

800kgs

1200kgs

1200kgs

Rigid Caster

N/A

N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.43kgs

Standard ISO22883

#### Advantages at a glance


Rolling Resistance


Operating Noise

 $\bullet$   $\circ$   $\circ$   $\circ$ 


Floor Surface Preservation • • • • • •

#### **Dimensions**





## Mounting

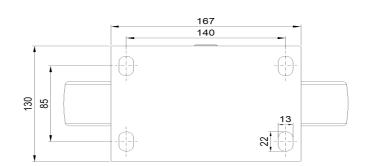

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.