


1102 B Type Caster Series

PU (red flat) Wheel Diameter x Wheel Width 254x 62mm

EAN

KS-11021000332011

Swivel Caster with Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron red Bearing - Ball Bearing

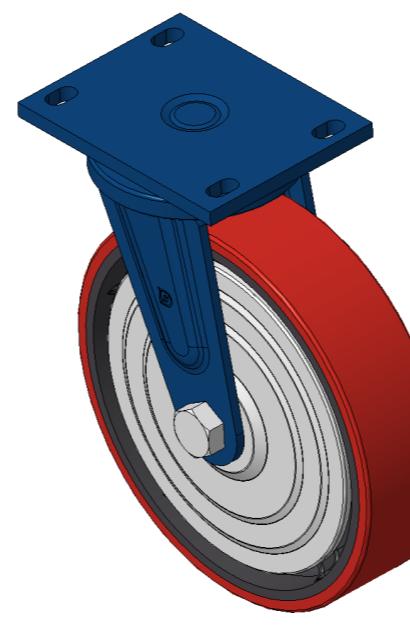

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 10-1/16 "

Wheel Width 2-1/2 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 6-5/8 " x 5-3/16 "

Bolt Hole Spacing 5-1/2 " x 3-3/8 "

Plate Hole 7/8 " x 9/16 "

Offset 1-7/8 "

Swivel Interference 14 "

Overall Height 12-3/16 "

Swivel Radius 7 "

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 1323lbs

Load Capacity (Static) 1984lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 25.0lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

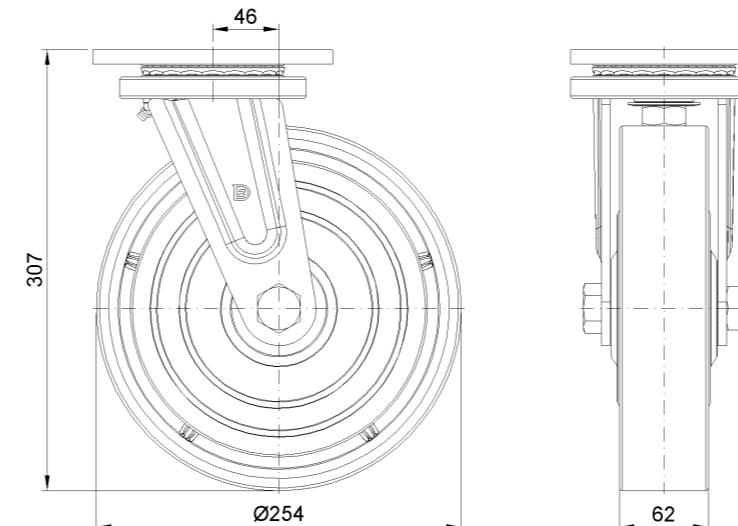

Mounting

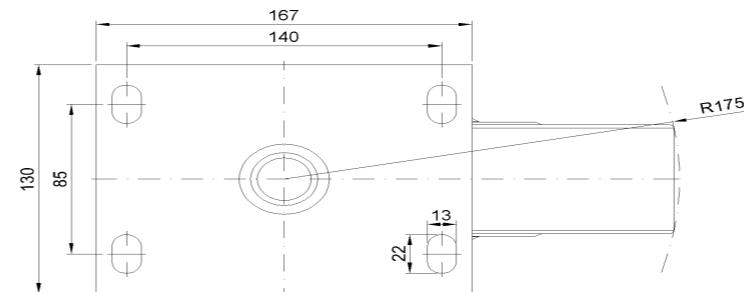

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com