1102 B Type Caster Series

Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter x Wheel Width 254x 62mm


Α

KS-11021000534111

Casters with rear brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 140x85 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 10-1/16 "
Wheel Width 2-1/2 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 6-5/8 " x 5-3/16 "

Bolt Hole Spacing 5-1/2 " x3-3/8 "

Plate Hole 7/8 " 9/16 "

Offset 1-7/8 "

Swivel Interference 351

Overall Height 12-3/16 "

Swivel Radius 7 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 1984lbs

Load Capacity (Static) 2976lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 25.9lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


• • • •

Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions



Mounting

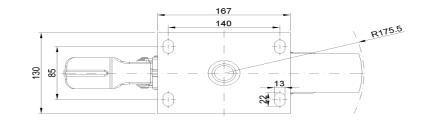

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.