## 1102 B Type Caster Series

# Dersheng Casters Keep Rolling

VQPU (brown round) Wheel Diameter x Wheel Width 250 x 62mm


Α

KS-11021000544041

Casters with rear brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

Swivel Radius

● Imperial ○ Metric

Wheel Diameter 10-1/16 "
Wheel Width 2-1/2 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 6-5/8 " x 5-3/16 "

 Bolt Hole Spacing
 5-1/2 " x3-3/8 "

 Plate Hole
 7/8 " 9/16 "

 Offset
 1-7/8 "

 Swivel Interference
 351

 Overall Height
 12-3/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 2646lbs

Load Capacity (Static) 3968lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Rear Brake

7 "

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 29.3lbs

Standard ISO22883

#### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### Dimensions

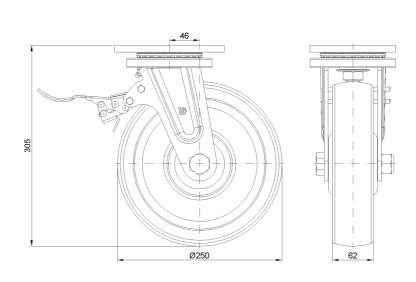

### Mounting

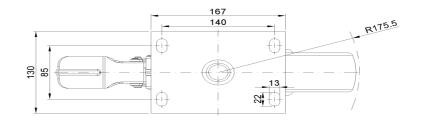

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.