



1102 B Type Caster Series


PU (red flat) Wheel Diameter x Wheel Width 305 x 70mm

EAN  
KS-11021200531011

Rigid Caster with Welded Caster Fork, blue-painted finish.  
Mounting Type - Top Plate, 140x85 Bolt Hole Spacing.  
Cast Iron core with High Quality Polyurethane Wheel Tread, Cast Iron brown.  
Bearings—Ball Bearings.

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

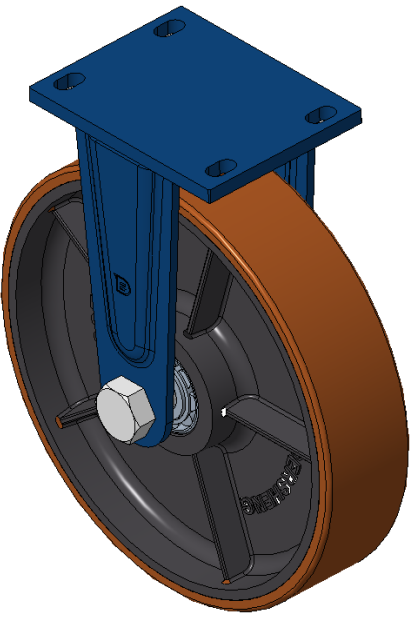

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 305mm                     |
| Wheel Width                                                            | 70mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 167 x 130mm               |
| Bolt Hole Spacing                                                      | 140x85mm                  |
| Plate Hole                                                             | 22 x 13mm                 |
| Overall Height                                                         | 354.5mm                   |
| Hardness Of Tread                                                      | 93±5° Shore A             |
| Load Capacity (Dynamic)                                                | 1000kgs                   |
| Load Capacity (Static)                                                 | 1500kgs                   |
| Temperature                                                            | -20°C to +70°C            |
| Fork Type                                                              | Rigid Caster              |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 15.46kgs                  |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

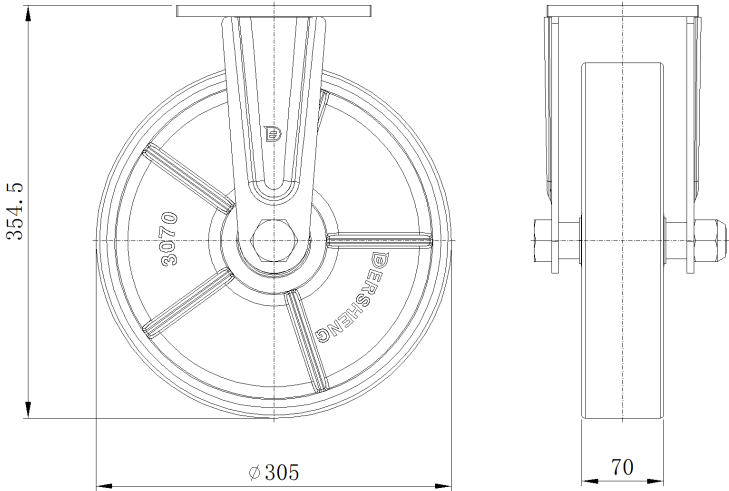

Mounting

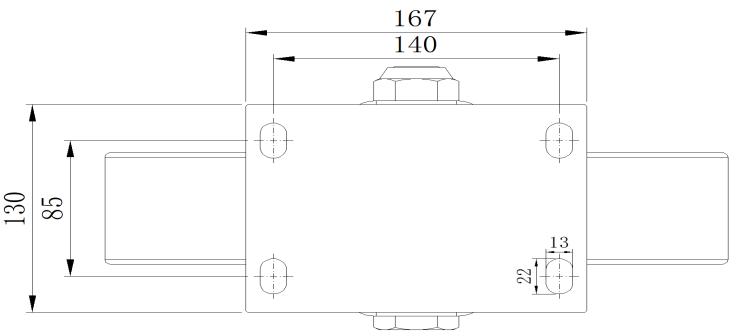

\* For any deviation between metric and imperial spec, please refer to the metric spec.