



1110-3 Series — Medi Series

TPR wheel (white dark gray) Wheel Diameter x Wheel Width 75 x 12mm


EAN

KS-11100302264013

Total Brake Caster, 42.5 x 42.5 mm beveled hole Fork, white Fork with reinforced Polypropylene Rustproof, Corrosion resistant, and flexible, suitable for low- and medium-sized trolleys High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing: Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

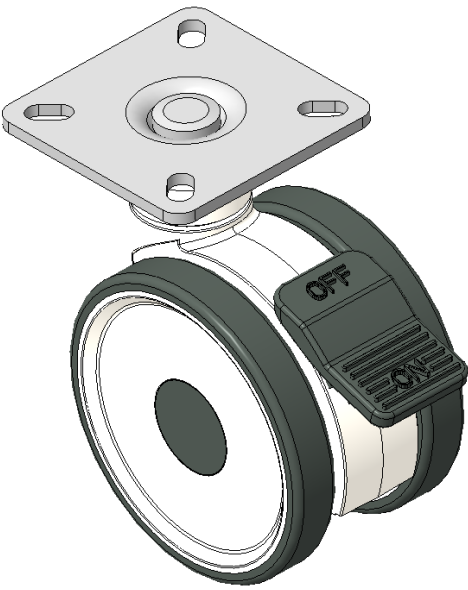

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 75mm                           |
| Wheel Width                                                            | 50.5mm                         |
| Wheel Bearing                                                          | Wheel With Plain Bearing       |
| Plate Size                                                             | 60 x 60mm                      |
| Bolt Hole Spacing                                                      | 42.5x42.5mm                    |
| Plate Hole                                                             | 11 x 6mm                       |
| Offset                                                                 | 22mm                           |
| Swivel Interference                                                    | 158mm                          |
| Overall Height                                                         | 100mm                          |
| Swivel Radius                                                          | 79mm                           |
| Hardness Of Tread                                                      | 82±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 30kgs                          |
| Load Capacity (Static)                                                 | 45kgs                          |
| Temperature                                                            | -20°C to +60°C                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 0.31kgs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

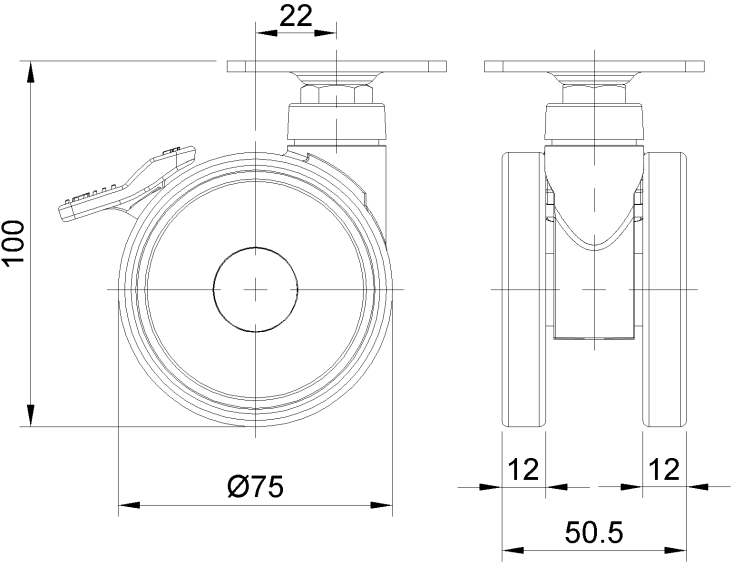

Mounting

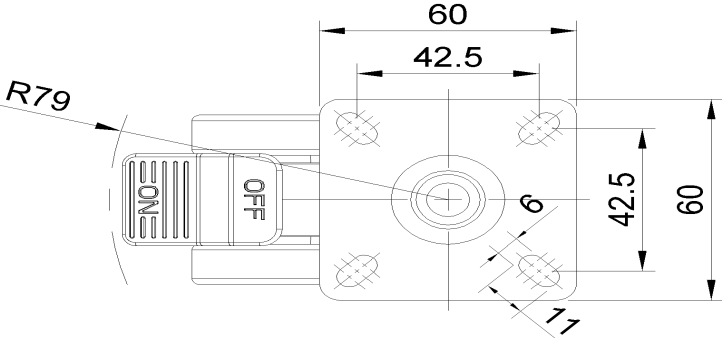

\* For any deviation between metric and imperial spec, please refer to the metric spec.