



1110-3 Series — Medi Series

TPR wheel (white dark gray) Wheel Diameter x Wheel Width 75 x 12mm


EAN

KS-11100302267013

Swivel double ball Caster with Ø11x22" stem and white Fork reinforced with High-quality Impact Resistance Polypropylene. Rustproof, Corrosion resistant, attractive, Economical, and Reinforced. High-quality Impact Resistance Polypropylene core with High-Quality Thermoplastic Rubber (TPR) Wheel Tread and C-ring. Dark gray, Anti-thread wheel cover.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

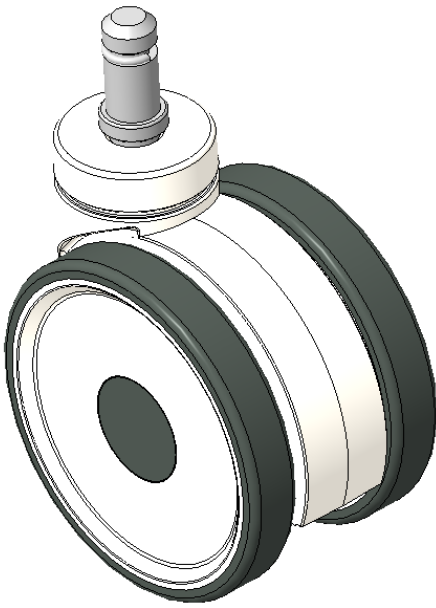

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	75mm
Wheel Width	50.5mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	Ø11x22
Threaded Size	22mm
Offset	22mm
Swivel Interference	132mm
Overall Height	119mm
Swivel Radius	66mm
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	30kgs
Load Capacity (Static)	45kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.16kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

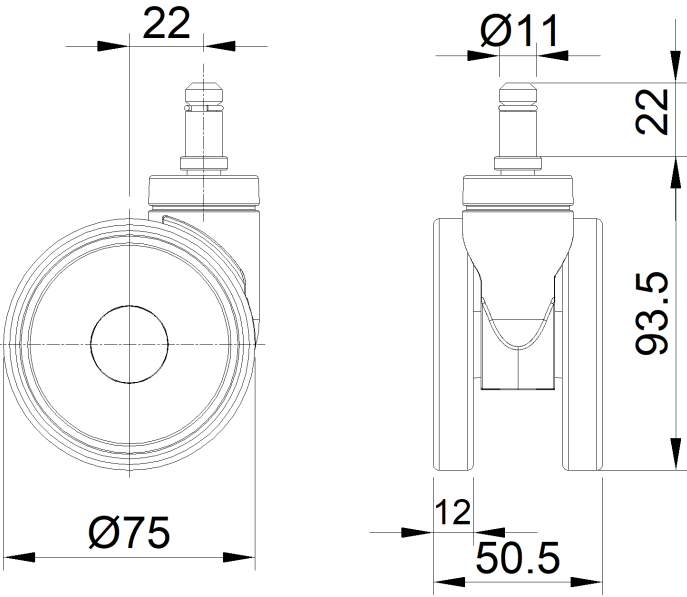

Mounting

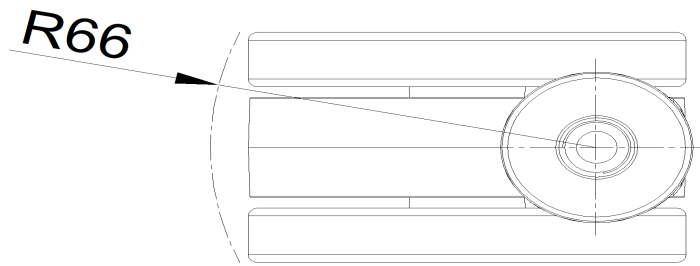

* For any deviation between metric and imperial spec, please refer to the metric spec.