

## 1112-1 2" Wide General Purposes Caster Series

QPU (brown round) Wheel Diameter × Wheel Width 100 x 34mm

A

KS-11120401532021

Modible Casters, Welded Caster Fork, black paint finish  
 Plate Mounting Type, 85x70mm Bolt Hole Spacing  
 Cast Iron wheel Wheel Wheel Hub, High Quality Polyurethane Wheel Tread, Cast Iron  
 brown  
 Bearings—Ball Bearings, with iron caps

Wheel Tread: Hhigh-Quality Polyurethane  
 Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data


Imperial  Metric

Wheel Diameter	4 "
Wheel Width	1-3/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-9/16 " x 4 "
Bolt Hole Spacing	3-3/8 " x 2-3/4 "
Plate Hole	13/16 " x 3/8 "
Offset	1-3/16 "
Swivel Interference	7-5/8 "
Overall Height	6-5/8 "
Swivel Radius	3-7/8 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	661lbs
Load Capacity (Static)	992lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	4.9lbs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

### Dimensions

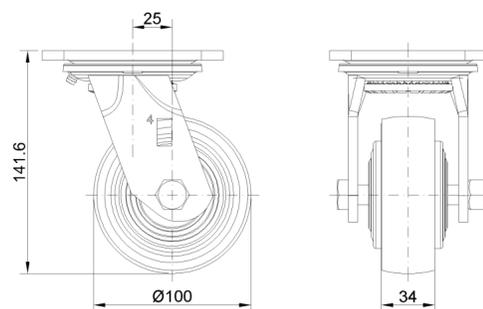

### Mounting

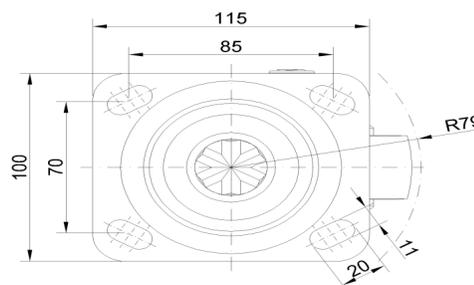

\* For any deviation between metric and imperial spec, please refer to the metric spec.