

1112-1 2" Wide General Purposes Caster Series

PU (red round) Wheel Diameter x Wheel Width 125 x 45mm

A

KS-11120501332011

Modible Casters, Welded Caster Fork, black painted finish
 Plate Mounting Type, 85x70mm Bolt Hole Spacing
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red
 Bearings—Ball Bearings

Wheel Tread: Hhigh-Quality Polyurethane
 Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter 125mm

Wheel Width 45mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Offset 30mm

Swivel Interference 192mm

Overall Height 167.5mm

Swivel Radius 96mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 230kgs

Load Capacity (Static) 345kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 3.04kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

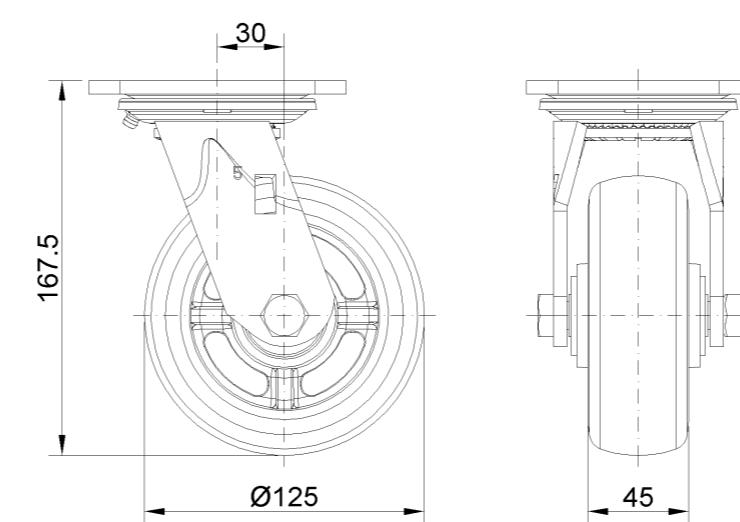

Mounting

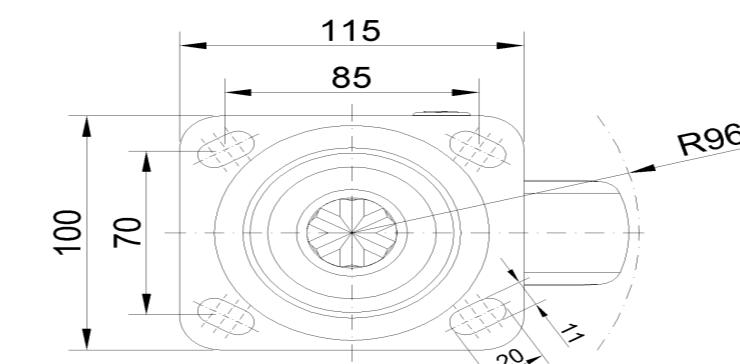

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com