

## 1112-1 2" Wide General Purposes Caster Series

W Resolute Wheel (Pearl Light Gray) Wheel Diameter × Wheel Width 125×50mm

A

KS-11120501452011

Modible Casters, Welded Caster Fork, black paint finish  
Base plate Mounting Type, 85x70mm Bolt Hole Spacing  
Reinforced Polypropylene rubber elastomer (TPR)  
Cast Iron pearlescent light gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: High-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data


Metric  Imperial

Wheel Diameter	125mm
Wheel Width	50mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	30mm
Swivel Interference	192mm
Overall Height	167.5mm
Swivel Radius	96mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	340kgs
Load Capacity (Static)	510kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.92kgs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

### Dimensions

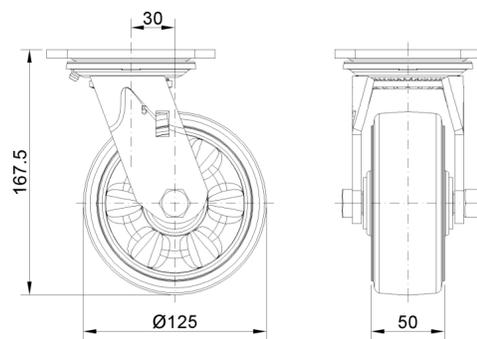

### Mounting

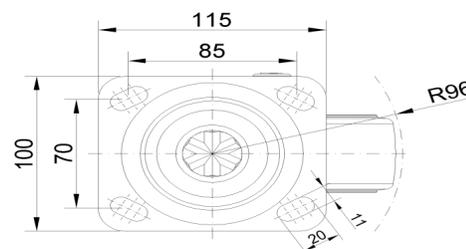

\* For any deviation between metric and imperial spec, please refer to the metric spec.