

## 1112-1 2" Wide General Purposes Caster Series



W Resolute Wheel (Pearl Light Gray) Wheel Diameter × Wheel Width 125×50mm

A

KS-11120501454021

Directional brake Casters, Welded Caster Fork, black paint finish  
 Base plate Mounting Type device, 85x70mm Bolt Hole Spacing  
 Reinforced Polypropylene rubber elastomer (TPR)  
 Cast Iron pearlescent light gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: High-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data


Imperial  Metric

Wheel Diameter	5 "
Wheel Width	2 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-9/16 " x 4 "
Bolt Hole Spacing	3-3/8 " x 2-3/4 "
Plate Hole	13/16 " x 3/8 "
Offset	1-3/16 "
Swivel Interference	12-1/8 "
Overall Height	6-5/8 "
Swivel Radius	6-1/16 "
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	750lbs
Load Capacity (Static)	1124lbs
Temperature	-4°F to +140°F
Fork Type	Swivel Caster With Directional Lock
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	4.6lbs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

### Dimensions

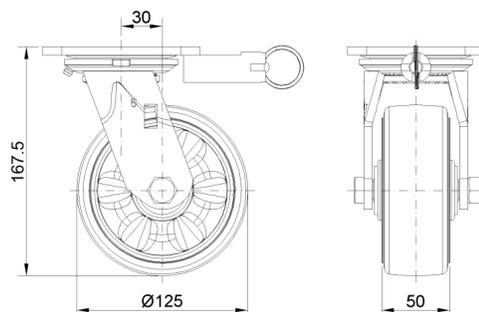

### Mounting

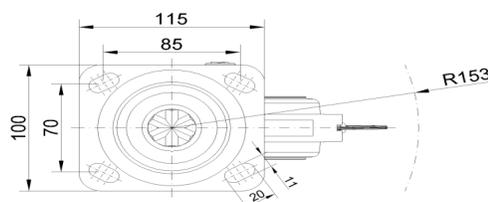

\* For any deviation between metric and imperial spec, please refer to the metric spec.