

1112-1 2" Wide General Purposes Caster Series

EQPU (brown round) Wheel Diameter x Wheel Width 125 x 50mm

A

KS-11120501552011

Modible Casters, Welded Caster Fork, black paint finish
 Plate Mounting Type, 85x70mm Bolt Hole Spacing
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown
 Bearings—Ball Bearings

Wheel Tread: Hhigh-Quality Polyurethane
 Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data


Metric Imperial

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 125mm |
| Wheel Width | 50mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 115 x 100mm |
| Bolt Hole Spacing | 85 x 70mm |
| Plate Hole | 20 x 11mm |
| Offset | 30mm |
| Swivel Interference | 192mm |
| Overall Height | 167.5mm |
| Swivel Radius | 96mm |
| Hardness Of Tread | 92±5° Shore A |
| Load Capacity (Dynamic) | 450kgs |
| Load Capacity (Static) | 675kgs |
| Temperature | -20°C to +70°C |
| Fork Type | Swivel Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 3.31kgs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-------|
| Rolling Resistance | ••••• |
| Operating Noise | ••••• |
| Floor Surface Preservation | ••••• |

Dimensions

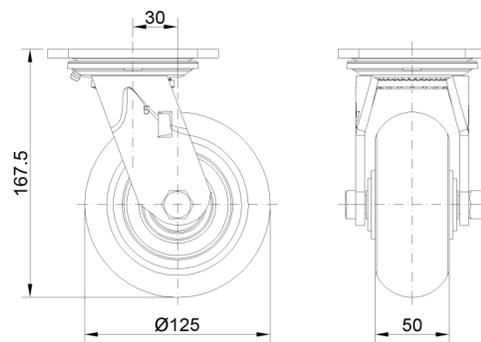

Mounting

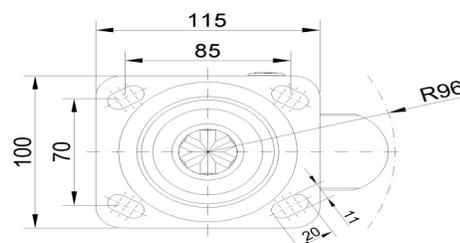

* For any deviation between metric and imperial spec, please refer to the metric spec.