

## 1112-1 2" Wide General Purposes Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 150 x 40mm

D

KS-11120601072011

Modible Casters, Welded Caster Fork, black paint finish  
 Plate Mounting Type, 85x70mm Bolt Hole Spacing  
 Reinforced Polypropylene (PA6), natural finish  
 Bearings—Ball Bearings, with metal caps

Wheel surface: Thermoplastic (PA6)  
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

Metric  Imperial

Wheel Diameter 150mm

Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Offset 35mm

Swivel Interference 230mm

Overall Height 189.5mm

Swivel Radius 115mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 350kgs

Load Capacity (Static) 525kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.50kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

## Dimensions

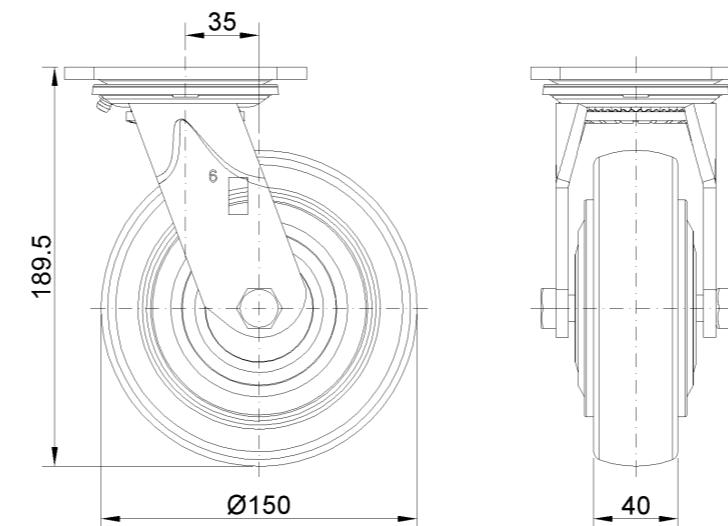

## Mounting

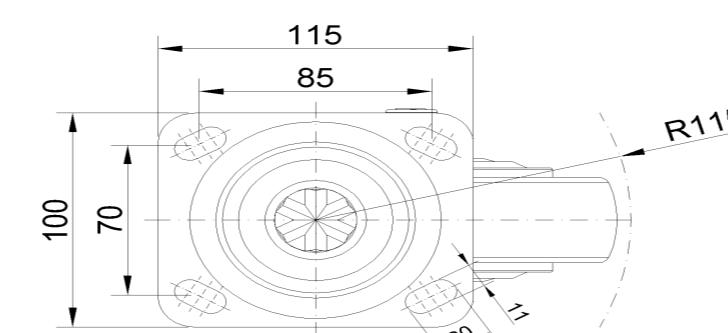

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com