

1112-1 2" Wide General Purposes Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 150 x 40mm

D


KS-11120601074031

Side-brake Casters, Welded Caster Fork, black paint finish. Base plate Mounting Type, 85x70mm Bolt Hole Spacing. Reinforced Polypropylene (PA6), natural finish. Bearings —Ball Bearings, with metal caps.

Wheel surface: Thermoplastic (PA6)

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

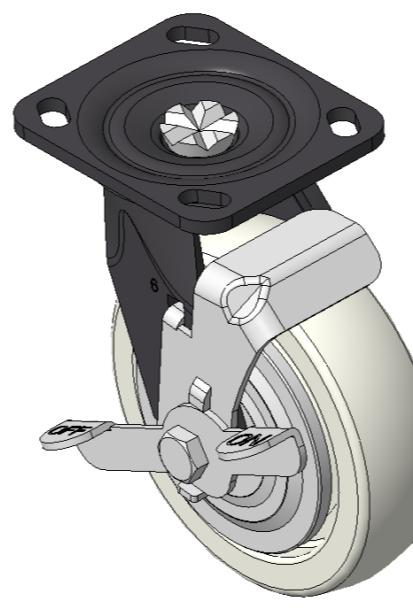

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 150mm

Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Offset 35mm

Swivel Interference 230mm

Overall Height 189.5mm

Swivel Radius 115mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 350kgs

Load Capacity (Static) 525kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.52kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

Dimensions

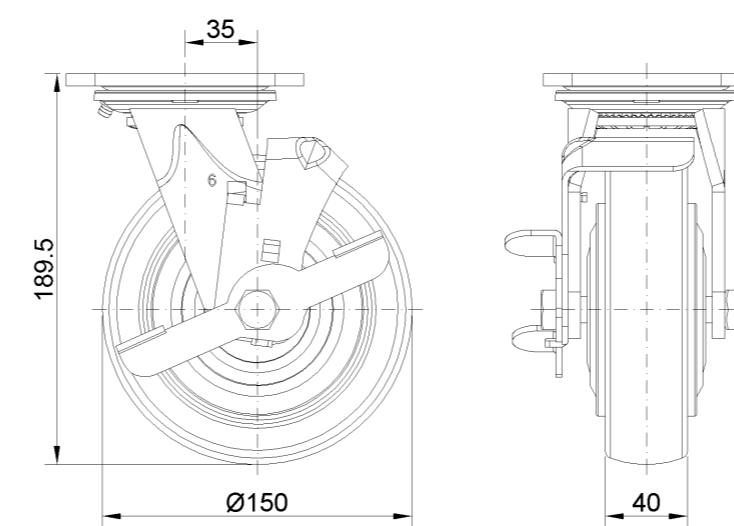

Mounting

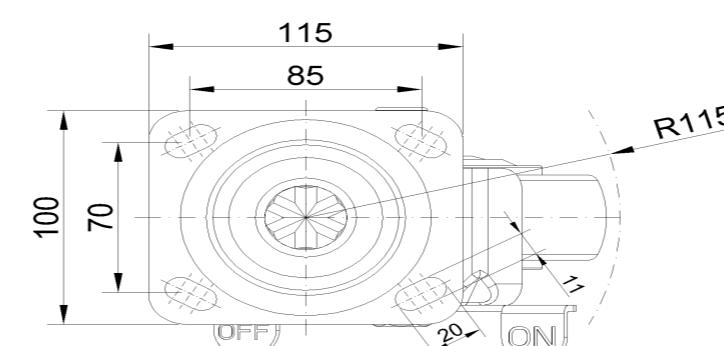

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com