


1112-1 2" Wide General Purposes Caster Series

PU (red round) Wheel Diameter x Wheel Width 150x 42mm

A

KS-11120601334111

Front-brake Casters, Welded Caster Fork, black paint finish. Base plate Mounting Type, 85x70mm Bolt Hole Spacing. Cast Iron wheel Wheel Hub, High Quality Polyurethane Wheel Tread, Cast Iron red. Bearings—Ball Bearings, with iron caps.

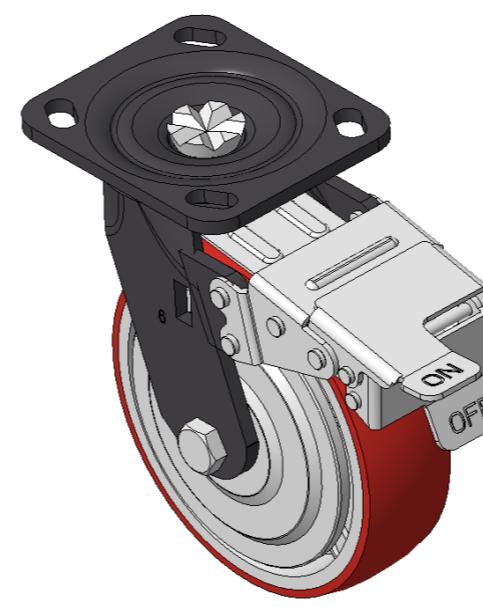

Wheel Tread: High-Quality Polyurethane
Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 150mm

Wheel Width 42mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Offset 35mm

Swivel Interference 330mm

Overall Height 189.5mm

Swivel Radius 165mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 450kgs

Load Capacity (Static) 675kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.70kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

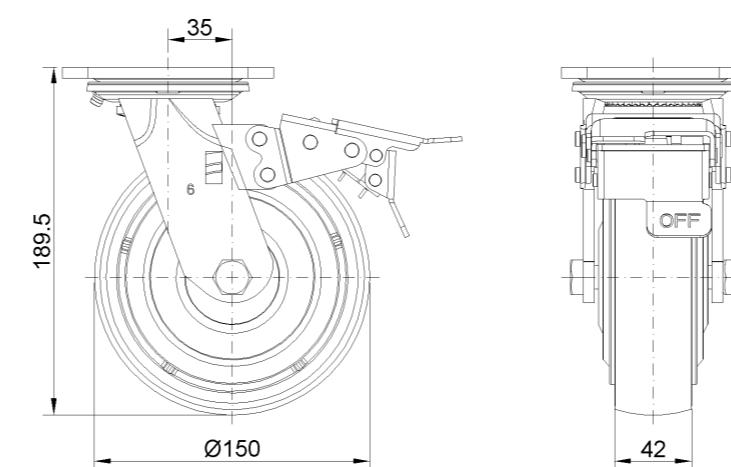

Mounting

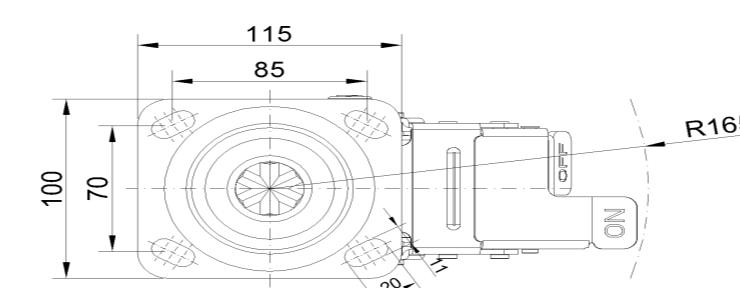

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com