

## 1112-1 2" Wide General Purposes Caster Series

W Resolute (Pearlescent Light Gray) Wheel Diameter x Wheel Width 150 x 50mm


A

KS-11120601454011

Front-brake Casters, Welded Caster Fork, black paint finish  
 Base plate Mounting Type device, 85x70mm Bolt Hole Spacing  
 Reinforced Polypropylene rubber elastomer (TPR), Cast Iron red  
 Bearings—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
 Wheel Center: High-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

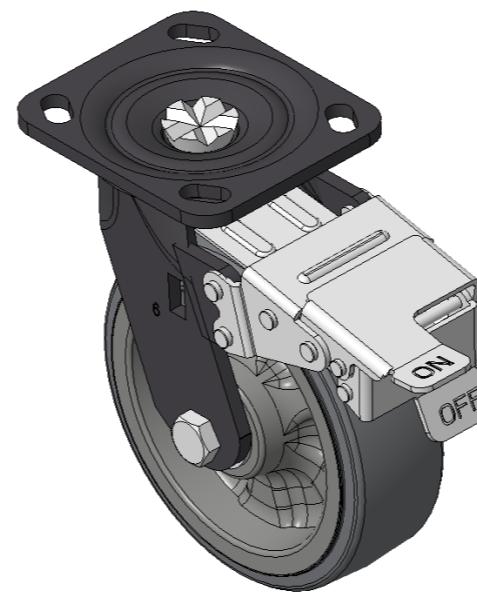

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	150mm
Wheel Width	50mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	35mm
Swivel Interference	330mm
Overall Height	189.5mm
Swivel Radius	165mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	408kgs
Load Capacity (Static)	612kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.64kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

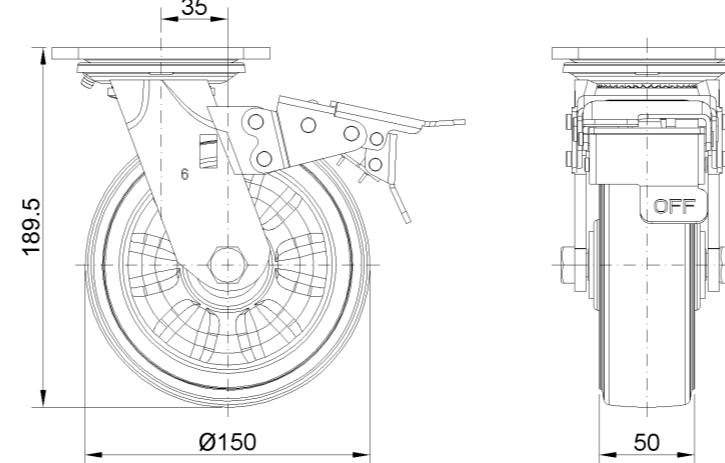

## Mounting

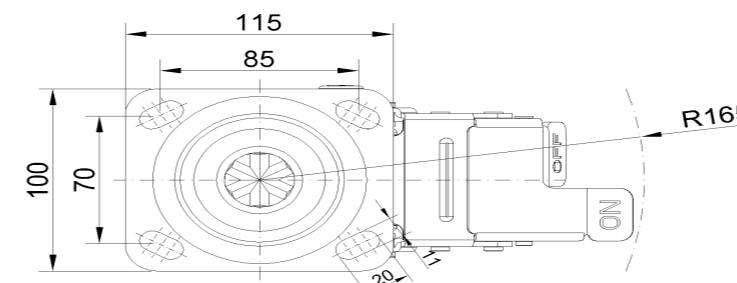

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com