

1112-1 2" Wide General Purposes Caster Series

W Resolute (Pearlescent Light Gray) Wheel Diameter x Wheel Width 150 x 50mm


A

KS-11120601454021

Front-brake Casters, Welded Caster Fork, black paint finish
 Base plate Mounting Type device, 85x70mm Bolt Hole Spacing
 Reinforced Polypropylene rubber elastomer (TPR), Cast Iron red
 Bearings—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)
 Wheel Center: High-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

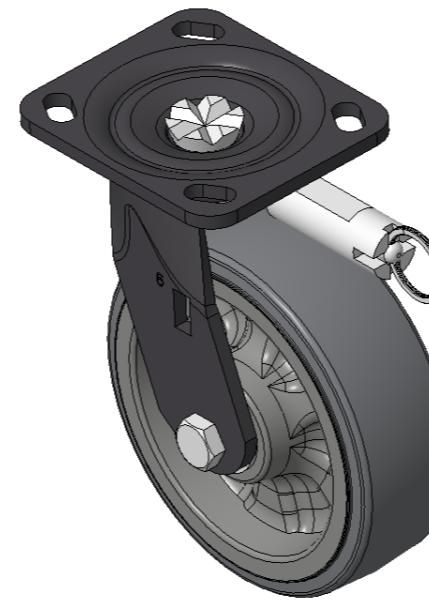

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 150mm

Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Offset 35mm

Swivel Interference 290mm

Overall Height 189.5mm

Swivel Radius 145mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 408kgs

Load Capacity (Static) 612kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Directional Lock

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.32kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance •••••


Operating Noise •••••

Floor Surface Preservation •••••

Dimensions

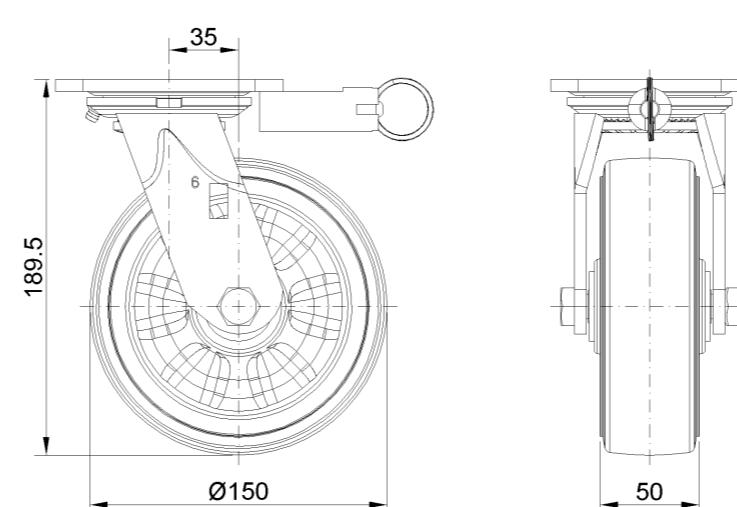

Mounting

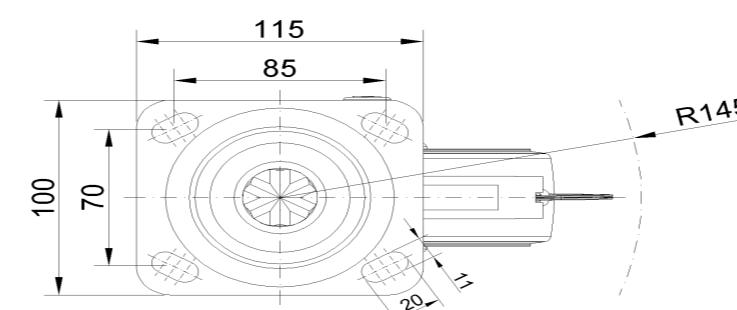

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com