

1112-1 2" Wide General Purposes Caster Series

W Resolute (Pearlescent Light Gray) Wheel Diameter x Wheel Width 150 x 50mm


A

KS-11120601454031

Side-brake Casters, Welded Caster Fork, black paint finish. Base plate Mounting Type device, 85x70mm Bolt Hole Spacing. Reinforced Polypropylene rubber elastomer (TPR), Cast Iron red. Bearings—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: High-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

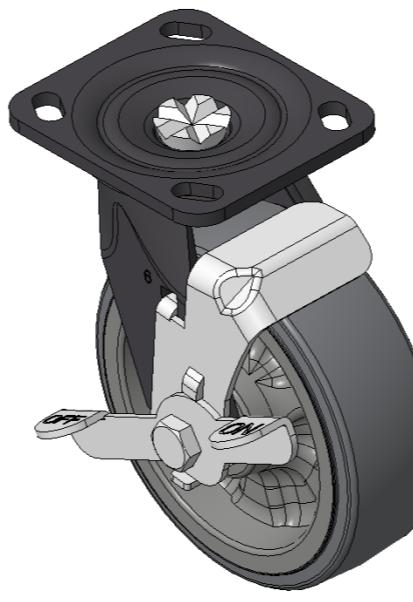

Picture may differ from original product


Technical Data

<input checked="" type="radio"/> Imperial <input type="radio"/> Metric
Wheel Diameter 6 "
Wheel Width 2 "
Wheel Bearing Wheels With Ball Bearings
Plate Size 4-9/16 " x 4 "
Bolt Hole Spacing 3-3/8 " x 2-3/4 "
Plate Hole 13/16 " x 3/8 "
Offset 1-3/8 "
Swivel Interference 9-1/8 "
Overall Height 7-1/2 "
Swivel Radius 4-9/16 "
Hardness Of Tread 72±5° Shore A
Load Capacity (Dynamic) 899lbs
Load Capacity (Static) 1349lbs
Temperature -4°F to +140°F
Fork Type Swivel Caster With Side Brake
Stainless N/A
Electrical Conductivity N/A
Anti-Static N/A
Weight 5.3lbs
Standard ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

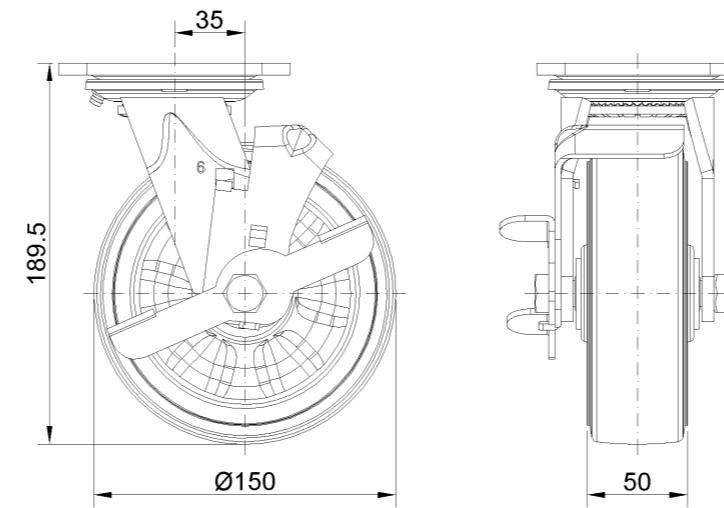

Mounting

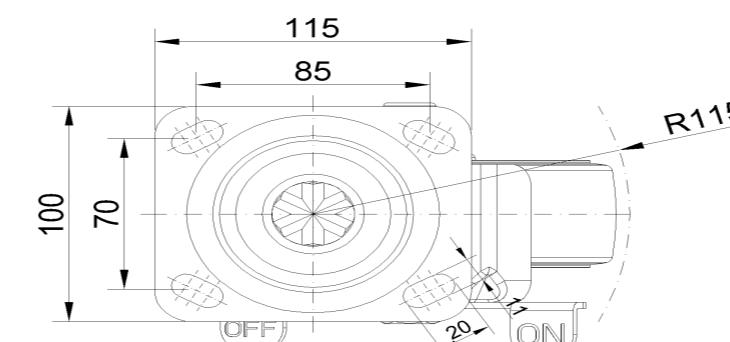

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com