

1112-1 2" Wide General Purposes Caster Series

EPU Wheel (Red Arc) Wheel Diameter×Wheel Width 150×50mm

A

KS-11120601522011

Swivel Casters, Welded Caster Fork
 Black painted finish, Mounting Type - Top Plate, 85x70mm Bolt Hole Spacing
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red
 Bearings—Ball Bearings

Wheel Tread: High-Quality Polyurethane
 Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	150mm
Wheel Width	50mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	35mm
Swivel Interference	230mm
Overall Height	190mm
Swivel Radius	115mm
Hardness Of Tread	94±5° Shore A
Load Capacity (Dynamic)	600kgs
Load Capacity (Static)	900kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	3.60kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • • ○
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

Dimensions

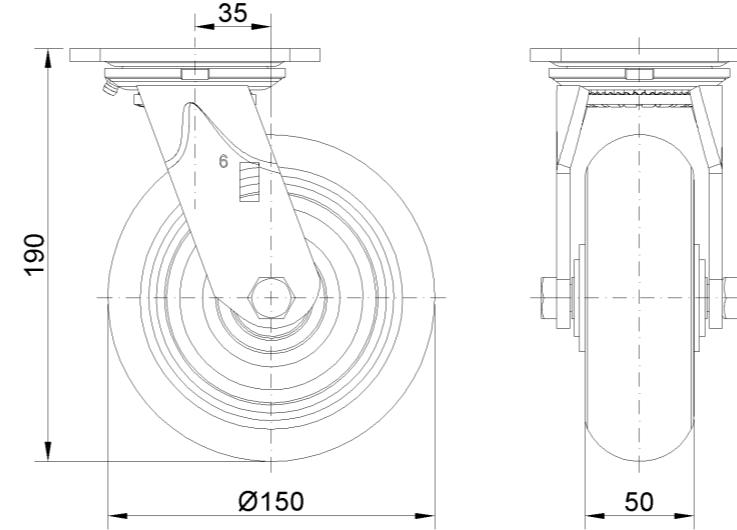

Mounting

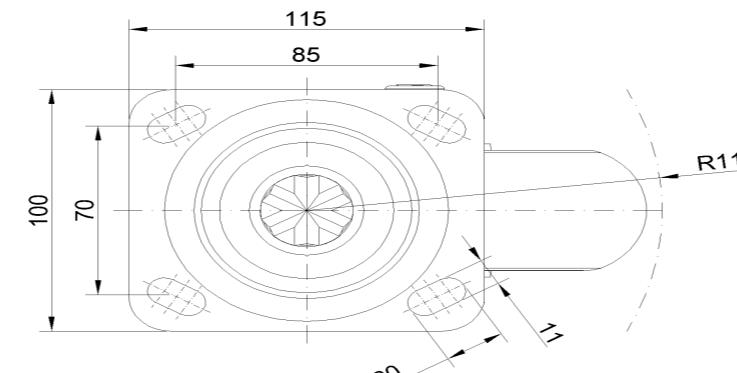

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com